

AGUAPLAST®

Walls better than new



Beissier

Providing solutions since 1930



Beissier

Index

| | | | | | |
|--------------|----------------------------------|-----------|-----------|--|-----------|
| 01 | Beissier | 4 | 03 | Renovation Specialities | 38 |
| | | | | Beissier Chameleon | 39 |
| | | | | Beissier Chameleon Spray | 40 |
| | | | | Dry Wall Primer | 41 |
| 02 | AGUAPLAST® | 10 | 04 | Beissier Rollers | 42 |
| 02.1. | Multipurpose | 11 | | Beissier Rollers for AGUAPLAST® | 43 |
| | AGUAPLAST® Universal PRO | 11 | 05 | Selection Guide | 44 |
| | AGUAPLAST® All 4 in | 12 | 06 | Quick Guide | 46 |
| | AGUAPLAST® Universal FASSADE | 13 | | | |
| 02.2. | Drywall PRO | 14 | | | |
| | AGUAPLAST® Drywall ProFinish | 14 | | | |
| | AGUAPLAST® Drywall ProJoint | 15 | | | |
| | AGUAPLAST® Drywall ProLight | 16 | | | |
| 02.3. | Renovation | 17 | | | |
| | AGUAPLAST® Express | 17 | | | |
| | AGUAPLAST® Rapid FASSADE | 18 | | | |
| | AGUAPLAST® Renova Joint | 19 | | | |
| | AGUAPLAST® Renovation | 20 | | | |
| 02.4. | Skim Coating | 21 | | | |
| | AGUAPLAST® Super Fine | 21 | | | |
| | AGUAPLAST® Standard Professional | 22 | | | |
| | AGUAPLAST® Top finish | 23 | | | |
| 02.5. | Filling | 24 | | | |
| | AGUAPLAST® Top Fill | 24 | | | |
| | AGUAPLAST® Lite Fill | 25 | | | |
| | AGUAPLAST® Rapid Fill | 26 | | | |
| 02.6. | Repairing | 27 | | | |
| | AGUAPLAST® Super Repair | 27 | | | |
| | AGUAPLAST® Beton Repair | 28 | | | |
| | AGUAPLAST® Rapiduro | 29 | | | |
| | AGUAPLAST® Fibra | 30 | | | |
| | AGUAPLAST® Flex Fill | 31 | | | |
| | AGUAPLAST® Exterior | 32 | | | |
| | AGUAPLAST® Fill & Finish | 33 | | | |
| | AGUAPLAST® Instant | 34 | | | |
| 02.7. | Wood & Timber | 35 | | | |
| | AGUAPLAST® Woodfinisher | 35 | | | |
| | AGUAPLAST® Woodfiller | 36 | | | |
| | AGUAPLAST® Wood Repair Filler | 37 | | | |

01

Beissier

History of innovation and commitment to the future

Since its origins in Paris in 1872, **Beissier** has travelled a path of **transformation and innovation** that has made the company a **benchmark in the world of painter's products**, setting milestones that still define its identity today.

Over the decades, its products have become **symbols of quality and reliability for generations of professionals**. But the history of **Beissier** is not only a chronology of technical achievements; it is also a deeply human story. Every breakthrough has been driven by the **dedication** of its teams, **collaboration** with its customers and a shared vision of **building a better future**.

The recent opening of the **BeCenter**, an **immersive 800 m² exhibition space** where the company showcases its essence and creates an environment of exchange and training for all market operators, is a further demonstration of the company's spirit of innovation and collaboration.



Sustainability at Beissier

Present Challenges, Future Commitment

Beissier has integrated **sustainability** as one of the strategic pillars of its business model. Its approach ranges from **internal culture** to **innovation in products and processes**, and **the following milestones** can be highlighted:

01.



Carbon footprint

In 2023, **Beissier** calculated its carbon footprint under the **international GHG Protocol standard**. This certification not only validates its efforts, but also establishes a solid basis for defining specific improvement actions.

02.



Electricity consumption and self-sufficiency.

In 2023, **Beissier** completed the installation of **solar panels** on **4,200 m² of roof**, enabling it to generate **30% of its annual energy consumption**. By 2026, the objective is to use 100% of the energy generated by the panels, returning the surplus to the general grid.

03.



Reducing the use of plastic in containers and packaging

Beissier has already been working for years on **reducing the use of plastics in its processes**, and also the evolution from virgin plastic packaging to **recycled**, thus **reducing its carbon footprint** and promoting the **circular economy**.

04.



Reducing gas consumption

The **radiant tube heating system** has been redesigned, **reducing gas consumption by 40%**. This measure not only improves energy efficiency, but also reduces greenhouse gas emissions.

05.



Waste minimisation

Beissier is constantly researching ways to reuse waste from manufacturing processes. To date, **30% of the waste is recovered from powdered waste**, while research is continuing.

AGUAPLAST®

More than 80 years repairing walls and building trust

AGUAPLAST®, a brand that has accompanied generations of **professionals** in the surface **preparation and repair** market.

Founded in 1944, **AGUAPLAST®** was the first filler on the Spanish market, and since then it has become synonymous with reliability, innovation and quality.

For more than 80 years, **AGUAPLAST®** has evolved alongside painters, decorators and renovators, listening to their needs and offering specific solutions for each challenge, without ever losing its commitment to a job well done.

Today, **AGUAPLAST®** is not only a leader in Spain, but also a reference in many European markets, exporting its know-how to more than 25 countries.





SMALL CHANGES FOR A MORE SUSTAINABLE FUTURE

In a world that demands responsibility, **AGUAPLAST®** has been able to adapt without losing its essence. Its **commitment to sustainability** translates into concrete and measurable actions:



EPD Certification

AGUAPLAST® was in 2015 the first European brand of fillers to obtain the Environmental Product Declaration (EPD).

In 2025, a new EPD was obtained for most of the **AGUAPLAST®** ready to use products.



First 100% Biobased filler

AGUAPLAST® introduced the first 100% Biobased fillers to the market, certified by an external laboratory, reducing the use of fossil derivatives without compromising the result.



Recycled and recyclable packaging

AGUAPLAST® packaging is made from recycled materials and is 100% recyclable. The cardboard and paper used are **FSC / PEFC certified**, guaranteeing their origin in sustainably managed forests.



VOC emissions control

Almost all **AGUAPLAST®** products are rated A+ or A in Volatile Organic Compound (VOC) emissions, guaranteeing better indoor air quality.

Walls better than new,
and a cleaner, fairer and
more conscious future.



AGUAPLAST® Drywall Pro

Offering the best solution for professionals.

New formulations that seek to provide a practical and specific response to professionals in the sector, with the aim of **improving application, productivity and providing exceptional results** in each project. A range with pioneering formulas that make **AGUAPLAST® Drywall Pro** a benchmark in the market.

New products, **new opportunities.**



EASY, INNOVATIVE AND ADAPTED TO YOUR NEEDS


LATEST GENERATION RAW MATERIALS

Born from scratch, the new **AGUAPLAST® Drywall Pro** ready-mix fillers contain **innovative chemistry**, with **novel raw materials**, to provide state-of-the-art products.




MORE ADAPTABLE

Designed to **perfectly match new construction substrates and systems** like plasterboard, cementitious boards, fiber-gypsum boards, chipboard, etc.

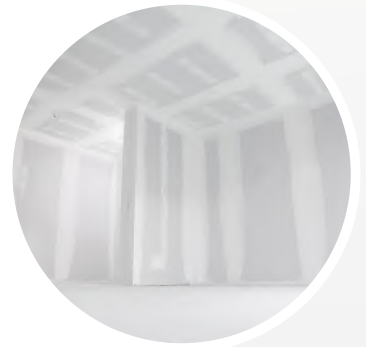

MULTI-TOOL

Controlled product **viscosity and thixotropy** allows smooth, **fluid application** with roller and blade, banjo tapers, bazookas or airless equipment, as well as with traditional tools.

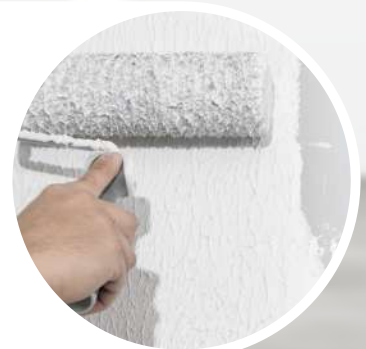

SUSTAINABILITY

The new **AGUAPLAST® Drywall Pro** buckets contain **up to 70% recycled material** and, thanks to their oval shape (larger sizes), product loading is easier when used with roller.



02

AGUAPLAST®

We present our **AGUAPLAST®** fillers range updated offering an alternative to the market to each product/solutions detected in our more than 80 years long history.

02.1 Multipurpose

AGUAPLAST® Universal Pro
AGUAPLAST® All 4 in
AGUAPLAST® Universal Fassade

02.2 Drywall PRO

AGUAPLAST® Drywall ProFinish
AGUAPLAST® Drywall ProJoint
AGUAPLAST® Drywall ProLight

02.3 Renovation

AGUAPLAST® Express
AGUAPLAST® Rapid Fassade
AGUAPLAST® Renova Joint
AGUAPLAST® Renovation

02.4 Skim Coating

AGUAPLAST® Super Fine
AGUAPLAST® Standard Professional
AGUAPLAST® Top finish

02.5 Filling

AGUAPLAST® Top Fill
AGUAPLAST® Lite Fill
AGUAPLAST® Rapid Fill

02.6 Repairing

AGUAPLAST® Super Repair
AGUAPLAST® Beton Repair
AGUAPLAST® Rapiduro
AGUAPLAST® Fibra
AGUAPLAST® Flex Fill
AGUAPLAST® Exterior
AGUAPLAST® Fill & Finish
AGUAPLAST® Instant

02.7 Wood & Timber

AGUAPLAST® Woodfinisher
AGUAPLAST® Woodfiller
AGUAPLAST® Wood Repair Filler




02.1 Multipurpose

AGUAPLAST®

Universal PRO

The all-round filler

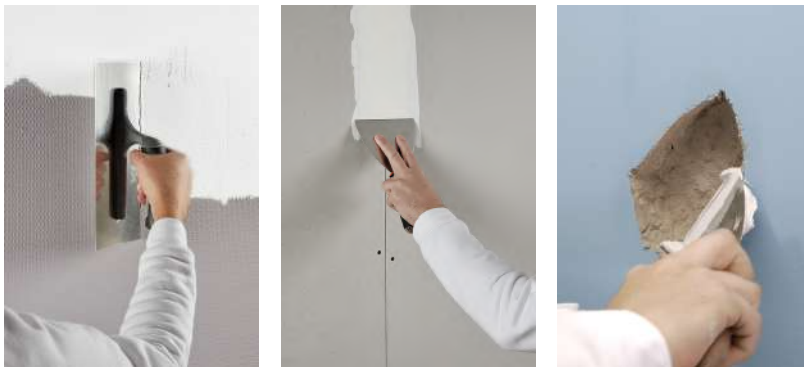


USAGES

- Filling of holes and cracks up to 50 mm.
- Levelling, smoothing and finishing of surfaces.
- Renovation of painted surfaces.
- Plasterboards: Joint filling and finishing, allowing plasterboard finish to any surface quality level.

CHARACTERISTICS

- Multi-purpose gypsum filler for interiors. The essential product in the equipment of professional painters.
- Quick and easy to mix and prepare.
- Easy to trowel, comfortable to apply, excellent yield.
- Allows wet on wet recoat.
- Dries and hardens quickly.
- Its low degree of absorption guarantees higher coverage and performance of the paint.
- Easy to sand.
- No shrinkage or cracking.
- Excellent bonding, even on satin paints, old fibreglass wall coverings and other non-absorbent substrates.
- Classification according to EN 13963: Type 4B.

Labels & certifications

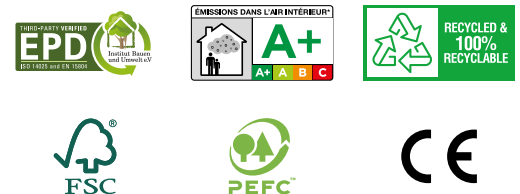

| | |
|--------------------------|-----------------------|
| Interior | 50 mm |
| 60 min | After complete drying |
| 1 h/mm max 24 h/50 mm | White |
| 0.45 L/kg | 5-35° C |
| 1 kg/m²/mm | |

| Packaging | Product Code | Palletization |
|------------|--------------|---------------|
| Sack 5 kg | 70082-002 | 140 Sacks |
| Sack 20 kg | 70082-001 | 50 Sacks |

02.1 Multipurpose

AGUAPLAST®

All 4 in

All-round ready mixed filler for interior application



Bucket 6 kg

Bucket 25 kg

Bucket 15 kg

USAGES

- Renovating on most interior painted substrates.
- Levelling of rough surfaces.
- Skim coating: Ensures a fine and low absorbent surface.
- Plasterboards: Joint filling and finishing, allowing plasterboard finish to any surface quality level.

CHARACTERISTICS

- Can be applied in thick coats up to 6 mm.
- Smooth application and easy sanding.
- Can be applied by trowel/blade, roller, airless machines and bazooka taping and finishing equipments.
- Very fine and white finish.
- Can be overcoated with any kind of paint.
- Classification according to EN 13963: Type 3A.

Labels & certifications



Interior



6 mm



No limit



After complete drying



24 h/mm



White



1.75 kg/m²/mm



5-35° C



| Packaging | Product Code | Unit Carton | Palletization |
|--------------|--------------|-------------|---------------|
| Bucket 6 kg | 70530-003 | 4 | 36 Cartons |
| Bucket 15 kg | 70530-002 | - | 44 Buckets |
| Bucket 25 kg | 70530-001 | - | 33 Buckets |

02.1 Multipurpose

AGUAPLAST®

Universal FASSADE

Lightweight ready mixed filler for exteriors



Bucket 10 L

USAGES

- Renovation of painted exterior walls.
- Exterior surface levelling and finishing.
- Filling of small holes up to 5 mm.
- Direct application on tiles and ceramics in humid areas such as bathrooms or kitchens.

CHARACTERISTICS

- Finer and less absorbent finishing than traditional cement based products.
- Excellent spread.
- Fast drying and very easy sanding.
- Excellent bonding even on non absorbent substrates such as glazed tiles, glass ceramics, painted facades etc.
- Water and humidity resistant.
- Resistant to mold growth and microorganism.
- Water vapour permeable.

Labels & certifications

Interior/Exterior



5 mm



No limit



After complete drying



12 h/mm



Light grey

1.2 kg/m²/mm

5-35° C

| Packaging | Product Code | Palletization |
|-------------|--------------|---------------|
| Bucket 10 L | 70079-001 | 44 Buckets |

02.2 Drywall PRO

AGUAPLAST®

Drywall ProFinish

Creamy ready-mix filler for plasterboard finishing



Bucket 25kg

USAGES

- Joint finishing and plasterboard skim-coating.
- Smoothing in layers up to 3-4 mm on absorbent substrates like plasterboard, cementitious boards, plaster, cement, concrete, etc.

CHARACTERISTICS

- Special consistency for application with Beissier rollers.
- Easy to spread and smooth down with blade.
- Can also be applied with bazooka, tapers, trowel, airless sprayers, etc.
- Provides a white, fine, low absorbent and solid background for any type of paint or wall covering.
- Very easy to sand.
- Classification according to EN 13963: Type 2A.

Labels & certifications



CE



Interior



4 mm



No limit



After complete drying



24 h/mm



White



1.75 kg/m²/mm



5-35° C



Packaging

Product Code

Unit Carton

Palletization

25kg oval Bucket

70770-001

-

24 Buckets

02.2 Drywall PRO

AGUAPLAST®

Drywall ProJoint

Creamy ready-mix multi-purpose joint filler



Bucket 20kg

USAGES

- Joint filling, finishing and plasterboard skim-coating.
- Smoothing in layers up to 6 mm on absorbent substrates like plasterboard, cementitious boards, plaster, cement, concrete, old masonry walls and on non-absorbent backgrounds like painted walls, fiberglass wall coverings, painted or not, etc.

CHARACTERISTICS

- Special consistency for application with Beissier rollers.
- Easy to spread and smooth down with blade.
- Can also be applied with bazooka, tapers, trowel, airless sprayers, etc.
- Excellent bonding to painted walls.
- Provides a white, fine, low absorbent and solid background for any type of paint or wall covering.
- Easy to sand.
- Classification according to EN 13963: Type 3A.

Labels & certifications



CE



Interior



6 mm



No limit



After complete drying



24 h/mm



White



1.75 kg/m²/mm



5-35° C



Packaging

Product Code

Unit Carton

Palletization

20kg oval Bucket

70773-001

-


24 Buckets

02.2 Drywall PRO

AGUAPLAST®

Drywall ProLight

Lightweight ready-mix multi-usage joint filler

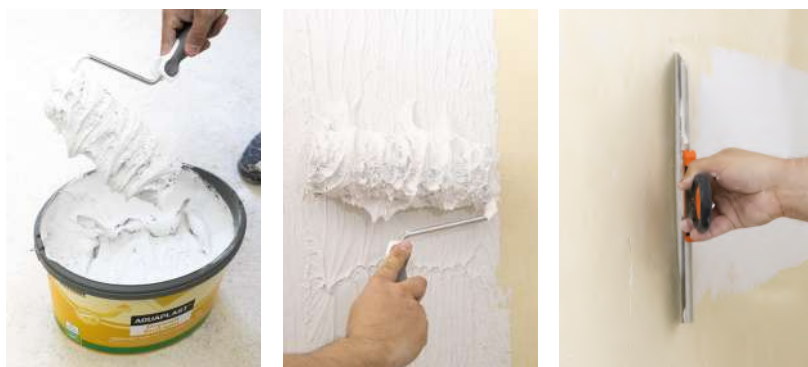

USAGES

- Joint filling, finishing and plasterboard skim-coating.
- Smoothing in layers up to 8 mm on absorbent substrates like plasterboard, cementitious boards, plaster, cement, concrete, old masonry walls and on non-absorbent backgrounds like painted walls, fiberglass wall coverings, painted or not, etc.

CHARACTERISTICS

- Lightweight. Easy and effortless to apply. Dries quicker than conventional ready-mix fillers.
- Excellent bonding on painted walls, ideal for renovation works.
- It allows for applications of up to 8mm in thickness without any risk of shrinkage.
- Special consistency for application with Beissier rollers. Easy to spread and smooth down with a blade.
- Provides a white, fine, low absorbent and solid background for any type of paint or wall covering.
- Very easy to sand.
- Classification according to EN 13963: Type 3A.

Labels & certifications



CE



Interior



8 mm



No limit



After complete drying



12 h/mm



White

1.2 kg/m²/mm
1 L/m²/mm

5-35° C



| Packaging | Product Code | Unit Carton | Palletization |
|------------------|--------------|-------------|---------------|
| 4L round Bucket | 70772-002 | 4 | 36 Cartons |
| 10L round Bucket | 70772-003 | - | 44 Buckets |
| 15L oval Bucket | 70772-001 | - | 24 Buckets |

02.3 Wall Renovation

AGUAPLAST®

Express

Interior quick dry filler



USAGES

- Filling holes and cracks of up to 5 cm.
- Direct renovation of all type of substrates including non absorbents such us glossy paints, tiles, ceramics etc.
- Renovation of humid interior areas like bathrooms and kitchens.
- Smoothing and levelling walls and ceilings.

CHARACTERISTICS

- "Express" drying: Can be sanded and covered as early as after 3 hours.
- Great filling capacity: Up to 50 mm thickness without shrinkage.
- Allows wet on wet recoat. The second layer, if required, can be applied before the first application is completely dry.
- Very easy and comfortable mixing and sanding.

Labels & certifications



Interior



50 mm



45 min



3 h



3 h



White



0.45 L/kg



5-30° C



1 kg/m²/mm



| Packaging | Product Code | Unit Carton | Palletization |
|------------|--------------|-------------|---------------|
| Box 1 kg | 70219-002 | 10 | 63 Cartons |
| Box 4 kg | 70219-001 | 4 | 28 Cartons |
| Sack 15 kg | 70219-004 | - | 48 Sacks |

02.3 Wall Renovation

AGUAPLAST®

Rapid FASSADE

Quick dry façade levelling and renovating filler



USAGES

- Renovation of painted exterior walls.
- Levelling and smoothing exterior substrates.
- Filling of holes and cracks.

CHARACTERISTICS

- Cement based powder filler.
- Very fast drying, sanding possible after 4 hours and overcoating after only 12 hours.
- Very good bonding to non-absorbent substrates including: painted facades, tiled facades, acrylic façade plasters, stonework tiling, etc.
- Fine white finish which facilitates the painting process.
- Allows wet on wet recoat. The second layer, if required, can be applied before the first is completely dry.
- Allows application in thick layers without cracking or shrinking.

Labels & certifications



Interior/Exterior



4 mm



45 min



Sandable:
after 4 h
Overcoating:
after 12 h



0.35 L/kg



White

1 kg/m²/mm

5-35° C

| Packaging | Product Code | Palletization |
|------------|--------------|---------------|
| Sack 5 kg | 70054-001 | 140 Sacks |
| Sack 15 kg | 70054-002 | 48 Sacks |

02.3 Wall Renovation

AGUAPLAST®

Renova Joint

Tile grout


**IMPROVED
FORMULA**

Tube 200 ml

USAGES

- Renovating and refreshing old tile joints.
- Ideal for kitchens and bathrooms.
- Interior and exterior use.

CHARACTERISTICS

- Deep white finish.
- Water, humidity & mould resistant.
- Excellent adhesion to all kind of substrates.

Labels & certifications



Interior/Exterior



3 mm



No limit



White



24 h



5-35° C



| Packaging | Product Code | Unit Carton | Palletization |
|-------------|--------------|-------------|---------------|
| Tube 200 ml | 70477-001 | 12 | 100 Cartons |

02.3 Wall Renovation

AGUAPLAST®

Renovation

Strong adhesion renovation filler



Sack 20 kg

USAGES

- Direct renovation on non-absorbent substrates: fibreglass wall coverings, textured surfaces, satin or gloss painted surfaces, old coats of oil-based paint, etc. No need to remove them.
- Levelling out and finishing of rough surfaces, old plaster, after removing wallpaper, etc.

CHARACTERISTICS

- Outstanding bonding.
- Allows wet on wet recoat.
- Good filling capacity up to 15 mm.
- Very fine finish.
- Perfect spread, good trowelling properties.
- Easy to sand.

Labels & certifications



Interior



15 mm



2 h



After complete drying



12 h / 3 mm



White



0.5 L/kg



5-35° C

1 kg/m²/mm

Packaging

Product Code

Palletization

Sack 20 kg

70502-004

50 Sacks

02.4 Skim Coating

AGUAPLAST®

Super Fine

Extra fine surface filler



Sack 20 kg

USAGES

- Ideal for high quality smooth finishes.
- Final coat for large plastered surfaces.
- Final preparation (Q4) of drywall and plasterboard.
- Fully recommended for covering with gloss or satin paints and wallpapers.

CHARACTERISTICS

- **100% bio-based* product** formulated with natural resins.
- Long working time of 24 hours. Allows mixing large quantities and saving time.
- Ensures a hard, cohesive, uniformly absorbing final finish.
- Effortless application.
- Easy to sand.

Labels & certifications



Interior



2 mm



24 h



After complete drying

30 min/0.2 mm
24 h/2 mm

White



0.5 L/kg



5-35° C

1 kg/m²/mm

Packaging

Product Code

Palletization

Sack 20 kg

70501-005



50 Sacks

*Certified by the CIRAM laboratory in accordance with ASTM D6866-24 standard.

02.4 Skim Coating

AGUAPLAST®

Standard Professional

Fine surface ready mixed skim-coat



USAGES

- Ideal for high quality smooth finishes.
- Final coat for large plastered surfaces.
- Final preparation (Q4) of drywall and plasterboard.
- Fully recommended for covering with gloss or satin paints and wallpapers.

CHARACTERISTICS

- **100% bio-based* product** formulated with natural resins.
- Extremely fine particle size.
- Thixotropic paste in a very easy-to-apply gel form.
- Very easy to sand.
- Reduces the absorption of the substrate allowing significant savings in paint.

Labels & certifications



Interior



2 mm



No limit



After complete drying



24 h/mm



White



1.75 kg/m²



5-35° C

| Packaging | Product Code | Palletization |
|--------------|--------------|---------------|
| Bucket 15 kg | 70068-003 | 44 Buckets |
| Bucket 25 kg | 70499-001 | 33 Buckets |

*Certified by the CIRAM laboratory in accordance with ASTM D6866-24 standard.

02.4 Skim Coating

AGUAPLAST®

Top Finish

Ready mixed fine surface filler



Bucket 1 kg

Bucket 5 kg

USAGES

- Ideal for minor surface repairs: small holes, scratches, etc.
- Applicable on absorbent surfaces.
- Enhance the paint finish.

CHARACTERISTICS

- **100% bio-based* product** formulated with natural resins.
- Provides a smooth and fine finish.
- Excellent adhesion to plaster, plasterboard, old paint substrates, concrete, cement or primed wood.
- Does not crack on the recommended layer thickness.
- Easy to apply and sand.

Labels & certifications




Interior



2 mm



No limit



After complete drying



24 h/mm



White



1.75 kg/m²/mm



5-35° C

| Packaging | Product Code | Unit Carton | Palletization |
|-------------|--------------|-------------|---------------|
| Bucket 1 kg | 70480-001 | 12 | 54 Cartons |
| Bucket 5 kg | 70480-002 | 4 | 36 Cartons |

*Certified by the CIRAM laboratory in accordance with ASTM D6866-24 standard.

02.5 Filling

AGUAPLAST®

Top Fill

Ready mixed deep filler



Bucket 1 kg

USAGES

- Filling holes and cracks on interior walls.
- Can be applied on plaster, plasterboard, gypsum board, concrete, cellular concrete, cement, polystyrene, primed wood, old paint substrates, etc.

CHARACTERISTICS

- Fills up to 10 mm.
- Resists shrinking and slumping.
- Excellent adhesion on absorbent substrates.
- Easy to apply and sand.

Labels & certifications



Interior



10 mm



No limit



After complete drying



12 h/mm



White



1.4 kg/m²/mm



5-35° C



| Packaging | Product Code | Unit Carton | Palletization |
|-------------|--------------|-------------|---------------|
| Bucket 1 kg | 70479-001 | 12 | 54 Cartons |

02.5 Filling

AGUAPLAST®

Lite Fill

Lightweight filler



USAGES

- Filling holes and cracks on interior and exterior walls.
- Repairs moulding of plaster, polystyrene, wood, etc.
- Ideal for filling holes in ceilings.
- Filling skirting board-wall joints, etc.

CHARACTERISTICS

- Single-pass filling.
- No shrinking or cracking in thick layers.
- Excellent adhesion.
- Dries quickly.
- No sanding required.

Labels & certifications



Interior/Exterior



After complete drying



No limit



White



2-24 h



5-35° C



No limit



| Packaging | Product Code | Unit Carton | Palletization |
|---------------|--------------|-------------|---------------|
| Bucket 250 ml | 70475-001 | 12 | 98 Cartons |
| Bucket 750 ml | 70475-002 | 12 | 54 Cartons |
| Bucket 4 L | 70475-003 | 4 | 36 Cartons |

02.5 Filling

AGUAPLAST®

Rapid Fill

Quick dry exterior lightweight filler



Bucket 1 kg

USAGES

- Filling holes and cracks on exterior walls.
- Can be applied on concrete, cellular concrete, cement, concrete blocks, bricks, wood, etc.

CHARACTERISTICS

- Concrete-like rough finish.
- Can be applied in any thickness.
- No shrinking or cracking.
- Touch dry after 30'.
- Excellent adhesion.
- Fibreglass reinforced.

Labels & certifications



Interior/Exterior



No limit



No limit



After complete drying



30 min



Grey

1.3 kg/m²/mm

5-35° C

| Packaging | Product Code | Unit Carton | Palletization |
|-------------|--------------|-------------|---------------|
| Bucket 1 kg | 70056-004 | 12 | 54 Cartons |

02.6 Repairing

AGUAPLAST®

Super Repair

Quick dry all-round exterior filler



Box 1 kg

Sack 15 kg

Box 5 kg

USAGES

- Reprofilling and shaping of cornices, edges, balconies, columns, pillars, etc. without formwork.
- Rebuilding of decorative elements and volumes of facades, statues, etc.
- Filling of holes and cracks of any size.
- Fixing and covering on all types of substrates.

CHARACTERISTICS

- Cement based powder filler.
- Quick drying and fast setting. Can be overcoated after 24 hours.
- Superb bonding strength onto all types of substrates.
- No thickness limitation. No shrinkage or crack.
- Can be easily cut, shaped and sculpted. Flexible.
- Shock resistant.

Labels & certifications



Interior/Exterior



No limit



30 min



24 h



0.4 L/kg



White



1 kg/m²/mm



5-35° C



| Packaging | Product Code | Unit Carton | Palletization |
|------------|--------------|-------------|---------------|
| Box 1 kg | 70222-001 | 10 | 63 Cartons |
| Box 5 kg | 70222-002 | 4 | 28 Cartons |
| Sack 15 kg | 70222-003 | - | 48 Sacks |

02.6 Repairing

AGUAPLAST®

Beton Repair

Waterproof filler



Box 5 kg

Sack 15 kg

USAGES

- Waterproofing of walls and partitions, including marine or extremely humid environments: basements, water tanks, etc.
- Repair and renovation of reinforced concrete elements.
- Reprofiling and repair of exterior elements (balconies, cornices, etc.).
- Fixing posts, drains, handrails and swimming pools maintenance.

CHARACTERISTICS

- Cement based powder filler.
- Waterproof in 3 mm thickness.
- Resistant to carbonation.
- Permeable to water vapour and CO₂.
- Resistant to seawater, barrier to saltpetre.
- Applicable directly on damp surfaces.
- Filling capacity up to 15 mm without formwork.
- Can be painted after 48 hours.

Labels & certifications



Interior/Exterior



15 mm



30 min



48 h



0.25 L/kg



Grey

1.2 kg/m²/mm

5-30° C



| Packaging | Product Code | Unit Carton | Palletization |
|------------|--------------|-------------|---------------|
| Box 5 kg | 70218-001 | 4 | 28 Cartons |
| Sack 15 kg | 70218-003 | - | 48 Sacks |

02.6 Repairing

AGUAPLAST®

Rapiduro

Quick-set fixing cement



Box 1 kg

Box 5 kg

USAGES

- Ideal for fixing posts, drains, handrails, etc. on masonry substrates.
- Stops leaking water.
- Can be applied on concrete, cellular concrete, cement, concrete blocks, bricks, etc. even if damp.

CHARACTERISTICS

- Sets hard in only 10 minutes, even under water.
- May be subjected to efforts after 20 minutes.
- Resistant to water and saltpeter.

Labels & certifications



Interior/Exterior



No limit



5 min



48 h



0.3 L/kg



Grey

1 kg/m²/mm

5-30° C


| Packaging | Product Code | Unit Carton | Palletization |
|-----------|--------------|-------------|---------------|
| Box 1 kg | 70221-001 | 10 | 63 Cartons |
| Box 5 kg | 70221-002 | 4 | 28 Cartons |

02.6 Repairing

AGUAPLAST®

Fibra

Flexible crack repair filler

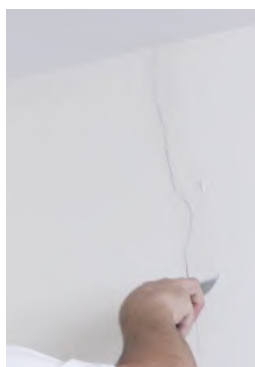

Tube 200 ml

Bucket 750 ml

Bucket 4 kg

USAGES

- Sealing and bridging of moving cracks and reoccurring fissures.
- Sealing of wood or timber panels.
- Can be applied on concrete, cement, plaster, gypsum boards, wood, old paint substrates.

CHARACTERISTICS

- Excellent adhesion.
- Highly flexible.
- Recommended layer thickness up to 3mm.
- Fibreglass reinforced for moving cracks.
- Waterproof.

Labels & certifications



Interior/Exterior



3 mm



No limit



After complete drying



2-24 h



White



1.2 kg/m²/mm



5-35° C



| Packaging | Product Code | Unit Carton | Palletization |
|---------------|--------------|-------------|---------------|
| Tube 200 ml | 70471-001 | 12 | 100 Cartons |
| Bucket 750 ml | 70471-002 | 12 | 54 Cartons |
| Bucket 4 kg | 70471-003 | 4 | 36 Cartons |

02.6 Repairing

AGUAPLAST®

Flex Fill

Exterior crack sealing compound



Bucket 1 kg

Bucket 5 kg

USAGES

- Filling and sealing of moving cracks and reoccurring fissures.
- Suitable to prevent water infiltration on floors.

CHARACTERISTICS

- Excellent adhesion to masonry substrates.
- Flexible between -10 and +70°C.
- Recommended layer thickness up to 10mm.
- Fiberglass reinforced.
- Concrete-like rough finish.
- Waterproof.

Labels & certifications



Interior/Exterior



5-10 mm



No limit



After complete drying



12 h/mm



Grey

1.5 kg/m²/mm

5-35° C

| Packaging | Product Code | Unit Carton | Palletization |
|-------------|--------------|-------------|---------------|
| Bucket 1 kg | 70473-001 | 12 | 54 Cartons |
| Bucket 5 kg | 70473-002 | 4 | 36 Cartons |

02.6 Repairing

AGUAPLAST®

Exterior

Exterior repair white filler



Box 1.5 kg

Box 6 kg

USAGES

- Filling and leveling on masonry substrates: Concrete, fine-grain concrete, cellular concrete, concrete block, cement, brick, etc.
- Suitable for damp substrates.

CHARACTERISTICS

- Cement based exterior filler.
- Easy to use.
- Long working time.
- Can be overcoated after 48 h.
- Provides a fine white hard surface.

Labels & certifications



Interior/Exterior



5 mm



2 h



48 h



0.3 L/kg



White

1.5 kg/m²/mm

5-30° C

| Packaging | Product Code | Unit Carton | Palletization |
|------------|--------------|-------------|---------------|
| Box 1.5 kg | 70220-002 | 10 | 45 Cartons |
| Box 6 kg | 70220-001 | 4 | 28 Cartons |

02.6 Repairing

AGUAPLAST®

Fill & Finish

Reparation and finishing interior powder filler



Box 1 kg

USAGES

- Filling of holes and cracks.
- Levelling and finishing of absorbent substrates such as plaster, plasterboards, concrete, concrete blocks, bricks...

CHARACTERISTICS

- Gypsum based powder filler.
- Filling capacity up to 30 mm.
- Easy and smooth mixing and sanding.
- Provides a white fine finish.

Labels & certifications



Interior



30 mm



1 h



After complete drying



1 h/mm



White



0.5 L/kg



5-35° C

1 kg/m²/mm

| Packaging | Product Code | Unit Carton | Palletization |
|-----------|--------------|-------------|---------------|
| Box 1 kg | 70472-002 | 10 | 63 Cartons |

02.6 Repairing

AGUAPLAST®

Instant

Quick dry ready mixed filler



Tube 200 ml

USAGES

- Ideal for minor surface repairs: scratches, screw and nail holes etc. on walls and ceilings.
- Allows rapid overcoating.

CHARACTERISTICS

- Excellent adhesion to most building substrates.
- Water and humidity resistant.
- Fine and white finish.

Labels & certifications



Interior/Exterior



3 mm



No limit



After complete drying



15 min



White

1.55 kg/m²/mm

5-35° C

| Packaging | Product Code | Unit Carton | Palletization |
|-------------|--------------|-------------|---------------|
| Tube 200 ml | 70474-001 | 12 | 100 Cartons |

02.7 Wood & Timber

AGUAPLAST®

Woodfinisher

Wood smoothing fine filler



Tube 350 gr

USAGES

- To cover wooden surfaces before enameling, lacquering or varnishing.
- May be applied on exterior timber and wood if conveniently protected with an exterior grade top coat.

CHARACTERISTICS

- Extremely fine and white finish.
- Flexible.
- Solvent Free.
- Provides a good protection against corrosion.
- Reduced absorption of the lacquer or varnish top coat.

Labels & certifications



Interior/Exterior



1 mm



No limit



After complete drying



1-2 h



White



1.95 kg/m²/mm



5-35° C



| Packaging | Product Code | Unit Carton | Palletization |
|-------------|--------------|-------------|---------------|
| Tube 350 gr | 70084-001 | 12 | 100 Cartons |

02.7 Wood & Timber

AGUAPLAST®

Woodfiller

Fibreglass reinforced



Bucket 1 kg



Tube 125 ml

USAGES

- Filling and repairing holes and gaps on wood and timber surfaces.
- Ideal for restoring wooden furniture.
- Filling holes and cracks on doors, windows frames, skirting boards & floor boards.

CHARACTERISTICS

- Fills up to 5 mm.
- Reinforced with fibreglass. Copes with up to 20 movement in wood.
- Resists shrinking.
- Solvent free.
- Can be overcoated with most varnishes and wood stains.
- Wide range of colours available.

Labels & certifications



Interior/Exterior



5 mm



No limit



After complete drying



1-4 h



5-35° C

1.4 kg/m²/mm

| Pack. | Color | Code | Unit C. | Palletization |
|-------------|------------|-----------|---------|---------------|
| Tube 125 ml | Beech | 70481-007 | 12 | 144 Cartons |
| | Cherry | 70481-006 | | |
| | Dard oak | 70481-017 | | |
| | Mahogany | 70481-005 | | |
| | Neutral | 70481-002 | | |
| | Oak | 70481-004 | | |
| | Pine | 70481-001 | | |
| | Rustic oak | 70481-016 | | |
| | Sapele | 70481-008 | | |
| | Teak | 70481-009 | | |
| | Walnut | 70481-003 | | |
| | Wenge | 70481-010 | | |

| Pack. | Color | Code | Unit C. | Palletization |
|-------------|---------|-----------|---------|---------------|
| Bucket 1 kg | Neutral | 70481-015 | 12 | 54 Cartons |
| | Oak | 70481-014 | | |
| | Pine | 70481-012 | | |
| | Walnut | 70481-013 | | |

02.7 Wood & Timber

AGUAPLAST®

Wood Repair Filler

Powder wood filler



Box 1 kg

USAGES

- Repairing and filling gaps on wood and timber.
- Reprofilling and shaping of wooden furniture.
- Repairing broken angles.
- Reconstitute missing wood due to decay.

CHARACTERISTICS

- Filling up to 50 mm.
- Easy to shape and smooth after setting.
- Quick drying.
- Allows sanding and overcoating after 3 hours.
- Excellent adhesion.
- Reinforced with fibres.
- Can be overcoated with most paints and varnishes for wood treatment.

Labels & certifications



Interior/Exterior



50 mm



30 min



After complete drying



3 h



Light Brown



0.4 L/kg



5-35° C

1 kg/m²/mm

| Packaging | Product Code | Unit Carton | Palletization |
|-----------|--------------|-------------|---------------|
| Box 1 kg | 70608-002 | 10 | 63 Cartons |

04 Renovation Specialities

The best selection of renovation specialities developed after accumulating years of experience and know-how.


Renovation Specialities

Beissier Chameleon
Beissier Chameleon Spray
Dry Wall Primer

03. Renovation Specialities

Beissier Chameleon

Multi-surface primer & finisher & stain covering paint

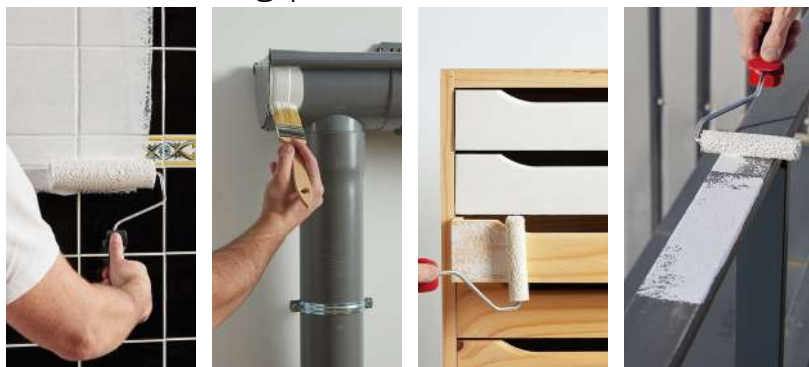

USAGES

- Primer and finishing coat.
- Bonding bridge for low adhesion substrates like metallic surfaces (iron, zinc, galvanized iron, aluminum, lead, brass, copper...), plastics, rigid PVC, polyester, fiberglass polyester, methacrylate, melamine, expanded polyurethane, ceramics, mosaic, glass, etc.
- Good stain blocking properties on grease, soot, ink, damp stains, nicotine, coffee, etc.
- Isolates and seals pore on wood and timber.

CHARACTERISTICS

- Water based.
- Excellent adhesion to multiple substrates: metal, plastic, ceramic, wood, etc.
- Rust inhibitor on metallic surfaces.
- Quick drying. Non-yellowing.
- Regulates substrate porosity.
- Heat resistant up to 100°C.
- Can be overcoated with all types of traditional wall & ceiling paints.
- White semi-matt finish.

Labels & certifications



Interior/Exterior



Water-based paints: 4-6 h
Solvent: 24 h
Polyurethane/epoxy: 48 h



Touch dry
30 min



Brush/Roller: 10-12 m²/L
Airless gun: 6-8 m²/L



Semi matt



5-35° C

| Packaging | Transp. | White | Unit Packs | Palletization |
|---------------|-----------|-----------|------------|---------------|
| Bucket 600 ml | 70600-002 | - | 6 | 112 Packs |
| Bucket 750 ml | - | 70600-001 | 6 | 112 Packs |
| Bucket 2.5 L | - | 70600-006 | 2 | 105 Packs |
| Bucket 2.5 L | 70600-007 | - | 2 | 105 Packs |

03. Renovation Specialities

Beissier Chameleon Spray

Multi-surface primer & finisher



Spray 400 ml

USAGES

- Primer and finishing coat.
- Intermediate Coat and Primer for Metallic surfaces (iron, zinc, galvanized iron, aluminum, lead, brass, copper...), plastics, rigid PVC, polyester, melamine, wood, ceramics, glass, etc.
- Seals and isolates pores in wood and timber. Ideal for restoring wooden furniture.

CHARACTERISTICS

- Anti-corrosive protection for metallic surfaces.
- Can be overcoated with any water or solvent based paint.
- Excellent adhesion and self-levelling.
- Quick drying. Touch dry in 30'.
- Heat resistant up to 100°C.
- Matt finish.
- Adjustable nozzle for a easy and flexible application.



Interior/Exterior



Water-based paints /
Synthetic enamels: 2h
Polyurethane / epoxy: 36 h



Touch dry
30 min



2-2,5 m²/400 ml



Matt



5-35° C



White

| Packaging | Product Code | Unit Carton | Palletization |
|--------------|--------------|-------------|---------------|
| Spray 400 ml | 70600-005 | 6 | 116 Cartons |

03. Renovation Specialities

Dry Wall Primer

Waterbased white primer ideal for plasterboard and new plaster



Bucket 4 L

Bucket 15 L

USAGES

- Regulates surface porosity across multiple substrates: plasterboard, plaster, concrete, cement, concrete blocks, bricks, old painted substrates, etc.

CHARACTERISTICS

- Improves adhesion of paints and other wall coverings.
- Opacifying properties.
- Improves performance of interior paints.
- Smooth and easy application.
- Quick drying and overcoating.
- White.
- Matt finish.

Labels & certifications



Interior



Matt



Touch dry 1h



White



10-12 m²/L



5-35° C

| Packaging | Product Code | Unit Carton | Palletization |
|-------------|--------------|-------------|---------------|
| Bucket 4 L | 70652-002 | 2 | 72 Packs |
| Bucket 15 L | 70652-001 | - | 33 Buckets |

04 Beissier Rollers

Beissier Rollers for **AGUAPLAST®** enable fast, even application of ready-mix fillers. Designed for walls and ceilings, they cut application time by up to two-thirds.

Beissier Rollers

Beissier Rollers for **AGUAPLAST®**

04. Beissier Rollers

Beissier Rollers

Rollers for **AGUAPLAST®** Ready-Mixed Fillers



Roller 10 cm

Roller 23 cm

USAGES

- Roller specially designed for applying ready-to-use AGUAPLAST fillers in all types of surfaces.
- Its application is easier and faster than with the traditional tools.

CHARACTERISTICS

- Roller diameter 48mm.
- Made of 18mm long special nylon fibers: highly resistant and resilient.
- Easy to load, will not sprinkle or fall down.
- Even and uniform spread across the surface.
- Three-times faster than traditional application techniques.
- Suitable for both plastering and jointing.
- Easy to clean with water.
- Bi-component ergonomic anti-slip handle.
- Can be used with standard roller handles.



| Packaging | Product Code | Unit Carton | Palletization |
|----------------------|--------------|-------------|---------------|
| 10cm sleeve | 70724-001 | 10 | 98 Cartons |
| 23cm sleeve | 70724-002 | 12 | 45 Cartons |
| 10cm handle | 70725-001 | 20 | 48 Cartons |
| 23cm handle | 70725-002 | 20 | 48 Cartons |
| 10cm complete roller | 70726-001 | 20 | 30 Cartons |
| 23cm complete roller | 70726-002 | 12 | 24 Cartons |



Complete roller



Handle



Sleeve

05

Selection Guide

AGUAPLAST® POWDER

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |  |  |  |
| P.28 | P.17 | P.32 | P.33 | P.18 | P.29 | P.20 | P.21 | P.27 | P.11 | P.37 |
| Beton repair | Express | Exterior | Fill & Finish | Rapid Fassade | Rapiduro | Renovation | Super Fine | Super repair | Universal PRO | Wood repair filler |
| Waterproof filler | Interior quick dry filler | Exterior Repair Filler | Interior Filler | For levelling and smoothing façades | Quick-set Fixing Cement | Strong adhesion renovation filler | Extra fine surface filler | Quick Dry All-Round Exterior Filler | The all round filler | Powder Wood Filler |

APPLICATION

| | | | | | | | | | | | |
|---------------------|---------------------------|-------------------------|---------------------------|-------------------------|--|-------------------------|-------------------------|-------------------------------|-------------------------|---------------------------|-------------------------|
| Interior | • | • | • | • | • | • | • | • | • | • | • |
| Exterior | • | --- | • | --- | • | • | --- | --- | • | --- | • |
| MAXIMUM THICKNESS | 15 mm | 50 mm | 5 mm | 30 mm | 4 mm | No limit | 15 mm | 2 mm | No limit | 50 mm | 50 mm |
| WORKING TIME | 30 min | 45 min | 2 h | 1 h | 45 min | 5 min | 2 h | 24 h | 30 min | 60 min | 30 min |
| DRYING TIME | --- | 3 h | --- | 1 h/mm | --- | --- | 12 h / 3 mm | 30 min / 0.2 mm - 24 h / 2 mm | --- | 1 h/mm - max 24 h / 50 mm | 3 h |
| OVERCOATING | 48 h | 3 h | 48 h | After complete drying | Sandable: after 4 hours Overcoating: after 12 h | 48 h | After complete drying | After complete drying | 24 h | After complete drying | After complete drying |
| MIXING PROPORTION | 0.25 L/kg | 0.45 L/kg | 0.3 L/kg | 0.5 L/kg | 0.35 L/kg | 0.3 L/kg | 0.5 L/kg | 0.5 L/kg | 0.4 L/kg | 0.45 L/kg | 0.4 L/kg |
| AVERAGE CONSUMPTION | 1.2 kg/m ² /mm | 1 kg/m ² /mm | 1.5 kg/m ² /mm | 1 kg/m ² /mm | 1 kg/m ² /mm | 1 kg/m ² /mm | 1 kg/m ² /mm | 1 kg/m ² /mm | 1 kg/m ² /mm | 1 kg/m ² /mm | 1 kg/m ² /mm |
| COLOUR | Grey | White | White | White | White | Grey | White | White | White | White | Light Brown |

ABSORBENT SUBSTRATES

| | | | | | | | | | | | |
|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Cement renders, smooth concrete, concrete mortars | • • • | • • • | • • • | • • • | • • • | • • • | • • • | • • • | • • • | • • • | --- |
| Blocks of concrete, cellular concrete | • • • | • • • | • • • | • • • | • • • | • • • | • • • | • | • • • | • • • | --- |
| Sand-lime and ceramic bricks | • • • | • • • | • • • | • • • | • • • | • • • | • • | --- | • • • | • • • | --- |
| Plasterboard, gypsum tiles, plaster, gypsum | --- | • • • | --- | • • • | • • • | --- | • • • | • • • | • • • | • • • | --- |
| Natural stone, stone cladding | • • • | • • • | • • • | • • | • • • | • • • | • • | • | • • • | • • • | --- |
| Wood, timber, plywood, chipboard | --- | • • | --- | • • | • • • | --- | • • | • • | • • • | • • | • • • |

NON-ABSORBENT SUBSTRATES

| | | | | | | | | | | | |
|---|-----|-------|-----|-----|-------|-----|-------|-----|-------|---------------|-----|
| Old coats of gloss, oil-based, satin paints | --- | • • • | --- | • | • • • | --- | • • | --- | • • • | After sanding | --- |
| Fibreglass wall coverings | --- | • • • | --- | • | • • • | --- | • • • | • | • • • | • • • | --- |
| Textured finished paints | --- | • • • | --- | • | • • • | --- | • • • | --- | • • • | • • • | --- |
| Matt paints | --- | • • • | --- | • | • • • | --- | • • • | • | • • • | • • • | --- |
| Glass blocks, glazed and glass tiles | --- | • • • | --- | --- | • • • | --- | --- | --- | • • • | --- | --- |

FAÇADES

| | | | | | | | | | | | |
|--------------------------|-----|-----|-----|-----|-------|-----|-----|-----|-------|-----|-----|
| Painted façades | --- | --- | --- | --- | • • • | --- | --- | --- | • • • | --- | --- |
| External acrylic plaster | --- | --- | --- | --- | • • • | --- | --- | --- | • • • | --- | --- |
| Tiled façades | --- | --- | --- | --- | • • • | --- | --- | --- | • • • | --- | --- |

DAMP SUBSTRATES

| | | | | | | | | | | | |
|-----------------|-------|-------|-------|-----|-------|-------|-----|-----|-------|-----|-----|
| Damp substrates | • • • | • • • | • • • | --- | • • • | • • • | --- | --- | • • • | --- | --- |
|-----------------|-------|-------|-------|-----|-------|-------|-----|-----|-------|-----|-----|

AGUAPLAST® READY MIXED

| | | | | | | | | | | | | | | | |
|-----------------------------|----------------------------|------------------------------------|---|------------------------------|---------------------------------|------------------------------|-----------------------|---------------------------------------|--------------|---------------------------------|---------------------------|---------------------------------|--------------------------------|---------------------------|----------------------------|
| | | | | | | | | | | | | | | | |
| P.12 | P.14 | P.15 | P.16 | P.30 | P.31 | P.34 | P.25 | P.26 | P.19 | P.22 | P.24 | P.23 | P.13 | P.36 | P.35 |
| ALL4in | Drywall ProFinish | Drywall ProJoint | Drywall ProLight | Fibra | Flex fill | Instant | Lite Fill | Rapid Fill | Renova Joint | Standard Professional | Top Fill | Top finish | Universal FASSADE | Woodfiller | Woodfinisher |
| Allround ready mixed filler | Creamy Ready mix filler | Ready mix multi-usage joint-filler | Lightweight ready mix multi-usage joint-filler | Flexible Crack Repair Filler | Exterior Crack Sealing Compound | Quick Dry Ready Mixed Filler | Lightweight Filler | Quick Dry Exterior Lightweight Filler | Tile Grout | Fine surface ready-mixed filler | Ready Mixed Deep Filler | Ready Mixed Fine Surface Filler | Lightweight ready mixed filler | Fibreglass Reinforced | Wood Smoothing Fine Filler |
| • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| --- | --- | --- | --- | • | • | • | • | • | • | --- | --- | --- | • | • | • |
| 6 mm | 4 mm | 6 mm | 8 mm | 3 mm | 5-10 mm | 3 mm | No limit | No limit | 3 mm | 2 mm | 10 mm | 2 mm | 5 mm | 5 mm | 1 mm |
| No limit | No limit | No limit | No limit | No limit | No limit | No limit | No limit | No limit | No limit | No limit | No limit | No limit | No limit | No limit | No limit |
| 24 h/mm | 24 h/mm | 24 h/mm | 12 h/mm | 2-24 h | 12 h/mm | 15 min | 2-24 h | 30 min | 24 h | 24 h/mm | 12 h/mm | 24 h/mm | 12 h/mm | 1-4 h | 1-2 h |
| After complete drying | After complete drying | After complete drying | After complete drying | After complete drying | After complete drying | After complete drying | After complete drying | After complete drying | --- | After complete drying | After complete drying | After complete drying | After complete drying | After complete drying | After complete drying |
| --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 1.75 kg/m ² /mm | 1.75 kg/m ² /mm | 1.75 kg/m ² /mm | 1.2 kg/m ² /mm 1 L/m ² /mm | 1.2 kg/m ² /mm | 1.5 kg/m ² /mm | 1.55 kg/m ² /mm | --- | 1.3 kg/m ² /mm | --- | 1.75 kg/m ² /mm | 1.4 kg/m ² /mm | 1.75 kg/m ² /mm | 1.2 kg/m ² /mm | 1.4 kg/m ² /mm | 1.95 kg/m ² /mm |
| White | White | White | White | White | Grey | White | White | Grey | White | White | White | White | Light Grey | Colors | White |
| • • • | • • • | • • • | • • • | • • • | • • • | • • • | • • • | • • • | --- | • • • | • • | • • • | • • • | --- | --- |
| • • • | • • | • • • | • • • | • • • | • • • | • • | • • • | • • • | --- | • • | • • • | • • | • • • | --- | --- |
| • • • | • | • • • | • • | • • • | • • • | • | • • • | • • • | --- | • • | • • • | • • | • • • | --- | --- |
| • • • | • • • | • • • | • • • | • • • | • • • | • • • | • • • | • • • | --- | • • • | • • • | • • • | • • • | --- | --- |
| • • | • | • • | • • | • • • | • • • | • | • • • | • • • | --- | • | • • | • | • • • | --- | --- |
| • • | • | • • | • • | • • • | • • • | • • | • • • | • • • | --- | • • | • • • | • • | • • • | • • • | • • • |
| • • | • | After sanding | After sanding | • • • | • • • | • • | • • • | • • • | --- | --- | --- | --- | • • • | --- | --- |
| • • • | • | • • • | • • • | • • • | • • • | • • | • • • | • • • | --- | • | • | • | • • • | --- | --- |
| • • • | • | • • • | • • • | • • • | • • • | • | • • • | • • • | --- | --- | • | --- | • • • | --- | --- |
| • • • | • • | • • • | • • • | • • • | • • • | • • | • • • | • • • | --- | • | • | • | • • • | --- | --- |
| --- | --- | --- | --- | --- | --- | --- | --- | --- | • • • | --- | --- | --- | • • • | --- | --- |
| --- | --- | --- | --- | • • • | • • • | --- | • | • • • | --- | --- | --- | --- | • • • | --- | --- |
| --- | --- | --- | --- | • • • | • • • | --- | • | • • • | --- | --- | --- | --- | • • • | --- | --- |
| --- | --- | --- | --- | --- | --- | --- | • | • | --- | --- | --- | --- | • • • | --- | --- |
| --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

• • • Especially suitable product • • Good product • Possible use --- Recommended use

06

Quick Guide

▼ AGUAPLAST

| PRODUCT | POWDER OR READY MIXED | PACKAGE | UC* CARTON | PRODUCT CODE | GENCOD UC* | GENCOD CARTON | UC* (height x width x length) | CARTON (height x width x length) | PALLETIZATION |
|---------------------------------|-----------------------|---------------|------------|--------------|-------------------|--------------------|-------------------------------|----------------------------------|---------------|
| AGUAPLAST ALL4IN | Ready mixed | Bucket 6 kg | 4 | 70530-003 | 8.412.131.671.707 | 58.412.131.671.702 | 20.5x21.5 | 22x41x41 | 36 |
| AGUAPLAST ALL4IN | Ready mixed | Bucket 15 kg | - | 70530-002 | 8.412.131.670.007 | - | 32x24.5 | - | 44 |
| AGUAPLAST ALL4IN | Ready mixed | Bucket 25 kg | - | 70530-001 | 8.412.131.669.995 | - | 30.5x34 | - | 33 |
| AGUAPLAST DRYWALL PROFINISH | Ready mixed | Bucket 25 kg | - | 70770-001 | 8.412.131.672.063 | - | 37,5x30x26 | - | 24 |
| AGUAPLAST DRYWALL PROJJOINT | Ready mixed | Bucket 20 kg | - | 70773-001 | 8.412.131.672.261 | - | 37,5x30x26 | - | 24 |
| AGUAPLAST DRYWALL PROLIGHT | Ready mixed | Bucket 4 L | 4 | 70772-002 | 8.412.131.672.353 | 58.412.131.672.358 | 20.5x21.5 | 22x41x41 | 36 |
| AGUAPLAST DRYWALL PROLIGHT | Ready mixed | Bucket 10 L | - | 70772-003 | 8.412.131.672.360 | - | 32x24.5 | - | 44 |
| AGUAPLAST DRYWALL PROLIGHT | Ready mixed | Bucket 15 L | - | 70772-001 | 8.412.131.672.254 | - | 37,5x30x26 | - | 24 |
| AGUAPLAST BETON REPAIR | Powder | Box 5 kg | 4 | 70218-001 | 8.412.131.664.938 | 58.412.131.664.933 | 30.5x21.5x12.5 | 31.5x26x43.5 | 28 |
| AGUAPLAST BETON REPAIR | Powder | Sack 15 kg | - | 70218-003 | 8.412.131.666.550 | - | 54.5x28x11.5 | - | 48 |
| AGUAPLAST EXPRESS | Powder | Box 1 kg | 10 | 70219-002 | 8.412.131.665.027 | 58.412.131.665.022 | 18x12.5x8 | 19x26x40.5 | 63 |
| AGUAPLAST EXPRESS | Powder | Box 4 kg | 4 | 70219-001 | 8.412.131.664.945 | 58.412.131.664.940 | 30.5x21.5x12.5 | 31.5x26x43.5 | 28 |
| AGUAPLAST EXPRESS | Powder | Sack 15 kg | - | 70219-004 | 8.412.131.666.543 | - | 54.5x28x11.5 | - | 48 |
| AGUAPLAST EXTERIOR | Powder | Box 1.5 kg | 10 | 70220-002 | 8.412.131.664.969 | 58.412.131.664.964 | 18x12.5x8 | 19x26x40.5 | 45 |
| AGUAPLAST EXTERIOR | Powder | Box 6 kg | 4 | 70220-001 | 8.412.131.664.952 | 58.412.131.664.957 | 30.5x21.5x12.5 | 31.5x26x43.5 | 28 |
| AGUAPLAST FIBRA | Ready mixed | Tube 200 ml | 12 | 70471-001 | 8.412.131.665.218 | 58.412.131.665.213 | 21x8x5 | 16x19.5x23 | 100 |
| AGUAPLAST FIBRA | Ready mixed | Bucket 750 ml | 12 | 70471-002 | 8.412.131.665.225 | 58.412.131.665.220 | 10x12.5 | 21x25x38 | 54 |
| AGUAPLAST FIBRA | Ready mixed | Bucket 4 kg | 4 | 70471-003 | 8.412.131.665.232 | 58.412.131.665.237 | 20.5x21.5 | 22x41x41 | 36 |
| AGUAPLAST FILL & FINISH | Powder | Box 1 kg | 10 | 70472-002 | 8.412.131.665.508 | 58.412.131.665.503 | 18x12.5x8 | 19x26x40.5 | 63 |
| AGUAPLAST FLEX FILL | Ready mixed | Bucket 1 kg | 12 | 70473-001 | 8.412.131.665.249 | 58.412.131.665.244 | 10x12.5 | 21x25x38 | 54 |
| AGUAPLAST FLEX FILL | Ready mixed | Bucket 5 kg | 4 | 70473-002 | 8.412.131.665.256 | 58.412.131.665.251 | 20.5x21.5 | 22x41x41 | 36 |
| AGUAPLAST INSTANT | Ready mixed | Tube 200 ml | 12 | 70474-001 | 8.412.131.665.263 | 58.412.131.665.268 | 21x8x5 | 16x19.5x23 | 100 |
| AGUAPLAST LITE FILL | Ready mixed | Bucket 250 ml | 12 | 70475-001 | 8.412.131.665.195 | 58.412.131.665.190 | 8x9.5 | 16x19.5x29.5 | 98 |
| AGUAPLAST LITE FILL | Ready mixed | Bucket 750 ml | 12 | 70475-002 | 8.412.131.665.201 | 58.412.131.665.206 | 10x12.5 | 21x25x38 | 54 |
| AGUAPLAST LITE FILL | Ready mixed | Bucket 4 L | 4 | 70475-003 | 8.412.131.669.094 | 58.412.131.669.099 | 20.5x21.5 | 22x41x41 | 36 |
| AGUAPLAST RAPID FASSADE | Powder | Sack 5 kg | - | 70054-001 | 8.412.131.664.259 | - | 39x22x8 | - | 140 |
| AGUAPLAST RAPID FASSADE | Powder | Sack 15 kg | - | 70054-002 | 8.412.131.664.266 | - | 54.5x28x11.5 | - | 48 |
| AGUAPLAST RAPID FILL | Ready mixed | Bucket 1 kg | 12 | 70056-004 | 8.412.131.669.742 | 58.412.131.669.747 | 10x12.5 | 21x25x38 | 54 |
| AGUAPLAST RAPIDURO | Powder | Box 1 kg | 10 | 70221-001 | 8.412.131.665.058 | 58.412.131.665.053 | 18x12.5x8 | 19x26x40.5 | 63 |
| AGUAPLAST RAPIDURO | Powder | Box 5 kg | 4 | 70221-002 | 8.412.131.665.065 | 58.412.131.665.060 | 30.5x21.5x12.5 | 31.5x26x43.5 | 28 |
| AGUAPLAST RENOVAJOINT | Ready mixed | Tube 200 ml | 12 | 70477-001 | 8.412.131.665.270 | 58.412.131.665.275 | 21x8x5 | 16x19.5x23 | 100 |
| AGUAPLAST RENOVATION | Powder | Sack 20 kg | - | 70502-004 | 8.412.131.672.056 | - | 52x30x11.5 | - | 50 |
| AGUAPLAST STANDARD PROFESSIONAL | Ready mixed | Bucket 15 kg | - | 70068-003 | 8.412.131.668.158 | - | 32x24.5 | - | 44 |
| AGUAPLAST STANDARD PROFESSIONAL | Ready mixed | Bucket 25 kg | - | 70499-001 | 8.412.131.666.567 | - | 30.5x34 | - | 33 |
| AGUAPLAST SUPERFINE | Powder | Sack 20 kg | - | 70501-005 | 8.412.131.672.049 | - | 52x30x11.5 | - | 50 |
| AGUAPLAST SUPER REPAIR | Powder | Box 1 kg | 10 | 70222-001 | 8.412.131.664.921 | 58.412.131.664.926 | 18x12.5x8 | 19x26x40.5 | 63 |
| AGUAPLAST SUPER REPAIR | Powder | Box 5 kg | 4 | 70222-002 | 8.412.131.665.041 | 58.412.131.665.046 | 30.5x21.5x12.5 | 31.5x26x43.5 | 28 |
| AGUAPLAST SUPER REPAIR | Powder | Sack 15 kg | - | 70222-003 | 8.412.131.669.223 | - | 54.5x28x11.5 | - | 48 |
| AGUAPLAST TOP FILL | Ready mixed | Bucket 1 kg | 12 | 70479-001 | 8.412.131.665.188 | 58.412.131.665.183 | 10x12.5 | 21x25x38 | 54 |
| AGUAPLAST TOP FINISH | Ready mixed | Bucket 1 kg | 12 | 70480-001 | 8.412.131.665.164 | 58.412.131.665.169 | 10x12.5 | 21x25x38 | 54 |
| AGUAPLAST TOP FINISH | Ready mixed | Bucket 5 kg | 4 | 70480-002 | 8.412.131.665.171 | 58.412.131.665.176 | 20.5x21.5 | 22x41x41 | 36 |
| AGUAPLAST UNIVERSAL FASSADE | Ready mixed | Bucket 10 L | - | 70079-001 | 8.412.131.662.613 | - | 32x24.5 | - | 44 |
| AGUAPLAST UNIVERSAL PRO | Powder | Sack 5 kg | - | 70082-002 | 8.412.131.662.088 | - | 39x22x8 | - | 140 |
| AGUAPLAST UNIVERSAL PRO | Powder | Sack 20 kg | - | 70082-001 | 8.412.131.662.057 | - | 52x30x11.5 | - | 50 |
| AGUAPLAST WOODFILLER BEECH | Ready mixed | Tube 125 ml | 12 | 70481-007 | 8.412.131.665.362 | 58.412.131.665.367 | 18.5x6.5x4 | 12.5x17x19 | 144 |
| AGUAPLAST WOODFILLER CHERRY | Ready mixed | Tube 125 ml | 12 | 70481-006 | 8.412.131.665.355 | 58.412.131.665.350 | 18.5x6.5x4 | 12.5x17x19 | 144 |

▼ AGUAPLAST

| PRODUCT | POWDER OR READY MIXED | PACKAGE | UC* CARTON | PRODUCT CODE | GENCOD UC* | GENCOD CARTON | UC* (height x width x length) | CARTON (height x width x length) | PALLETIZATION |
|---------------------------------|-----------------------|-------------|------------|--------------|-------------------|--------------------|-------------------------------|----------------------------------|---------------|
| AGUAPLAST WOODFILLER DARK OAK | Ready mixed | Tube 125 ml | 12 | 70481-017 | 8.412.131.669.384 | 58.412.131.669.389 | 18.5x6.5x4 | 12.5x17x19 | 144 |
| AGUAPLAST WOODFILLER NEUTRAL | Ready mixed | Tube 125 ml | 12 | 70481-002 | 8.412.131.665.317 | 58.412.131.665.312 | 18.5x6.5x4 | 12.5x17x19 | 144 |
| AGUAPLAST WOODFILLER NEUTRAL | Ready mixed | Bucket 1 kg | 12 | 70481-015 | 8.412.131.669.353 | 58.412.131.669.358 | 10x12.5 | 21x25x38 | 54 |
| AGUAPLAST WOODFILLER MAHOGANY | Ready mixed | Tube 125 ml | 12 | 70481-005 | 8.412.131.665.348 | 58.412.131.665.343 | 18.5x6.5x4 | 12.5x17x19 | 144 |
| AGUAPLAST WOODFILLER OAK | Ready mixed | Tube 125 ml | 12 | 70481-004 | 8.412.131.665.331 | 58.412.131.665.336 | 18.5x6.5x4 | 12.5x17x19 | 144 |
| AGUAPLAST WOODFILLER OAK | Ready mixed | Bucket 1 kg | 12 | 70481-014 | 8.412.131.669.346 | 58.412.131.669.341 | 10x12.5 | 21x25x38 | 54 |
| AGUAPLAST WOODFILLER PINE | Ready mixed | Tube 125 ml | 12 | 70481-001 | 8.412.131.665.300 | 58.412.131.665.305 | 18.5x6.5x4 | 12.5x17x19 | 144 |
| AGUAPLAST WOODFILLER PINE | Ready mixed | Bucket 1 kg | 12 | 70481-012 | 8.412.131.669.322 | 58.412.131.669.327 | 10x12.5 | 21x25x38 | 54 |
| AGUAPLAST WOODFILLER RUSTIC OAK | Ready mixed | Tube 125 ml | 12 | 70481-016 | 8.412.131.669.377 | 58.412.131.669.372 | 18.5x6.5x4 | 12.5x17x19 | 144 |
| AGUAPLAST WOODFILLER SAPELE | Ready mixed | Tube 125 ml | 12 | 70481-008 | 8.412.131.665.379 | 58.412.131.665.374 | 18.5x6.5x4 | 12.5x17x19 | 144 |
| AGUAPLAST WOODFILLER TEAK | Ready mixed | Tube 125 ml | 12 | 70481-009 | 8.412.131.665.386 | 58.412.131.665.381 | 18.5x6.5x4 | 12.5x17x19 | 144 |
| AGUAPLAST WOODFILLER WALNUT | Ready mixed | Tube 125 ml | 12 | 70481-003 | 8.412.131.665.324 | 58.412.131.665.329 | 18.5x6.5x4 | 12.5x17x19 | 144 |
| AGUAPLAST WOODFILLER WALNUT | Ready mixed | Bucket 1 kg | 12 | 70481-013 | 8.412.131.669.339 | 58.412.131.669.334 | 10x12.5 | 21x25x38 | 54 |
| AGUAPLAST WOODFILLER WENGE | Ready mixed | Tube 125 ml | 12 | 70481-010 | 8.412.131.665.393 | 58.412.131.665.398 | 18.5x6.5x4 | 12.5x17x19 | 144 |
| AGUAPLAST WOODFINISHER | Ready mixed | Tube 350 g | 12 | 70084-001 | 8.412.131.662.354 | 58.412.131.662.359 | 21x8x5 | 16x19.5x23 | 100 |
| AGUAPLAST WOOD REPAIR FILLER | Powder | Box 1 kg | 10 | 70608-002 | 8.412.131.669.490 | 58.412.131.669.495 | 18x12.5x8 | 19x26x40.5 | 63 |

▼ RENOVATION SPECIALITIES

| PRODUCT | PACKAGE | UC* CARTON | PRODUCT CODE | GENCOD UC* | GENCOD CARTON | UC* (height x width x length) | CARTON (height x width x length) | PALLETIZATION |
|-----------------------|---------------|------------|--------------|-------------------|--------------------|-------------------------------|----------------------------------|---------------|
| CHAMELEON TRANSPARENT | Bucket 600 ml | 6 | 70600-002 | 8.412.131.669.315 | 58.412.131.669.310 | 13x10 | 30.5x21x15 | 112 |
| CHAMELEON TRANSPARENT | Bucket 2.5 L | 2 | 70600-007 | 8.412.131.671.868 | - | 15.5x17 | 17x35x35 | 105 |
| CHAMELEON WHITE | Bucket 750 ml | 6 | 70600-001 | 8.412.131.669.261 | 58.412.131.669.266 | 13x10 | 30.5x21x15 | 112 |
| CHAMELEON WHITE | Bucket 2.5 L | 2 | 70600-006 | 8.412.131.671.790 | - | 15.5x17 | 17x35x35 | 105 |
| CHAMELEON WHITE | Spray 400 ml | 6 | 70600-005 | 8.412.131.669.735 | 58.412.131.669.730 | 19.5x7 | 20x14.5x21 | 116 |
| DRY WALL PRIMER | Bucket 4 L | 2 | 70652-002 | 8.412.131.671.394 | 58.412.131.671.399 | 20,5x21,5 | 20.5x20.5x40 | 72 |
| DRY WALL PRIMER | Bucket 15 L | - | 70652-001 | 8.412.131.670.540 | - | 30.5x34 | - | 33 |

▼ BEISSIER ROLLERS

| PRODUCT | UC* CARTON | PRODUCT CODE | GENCOD UC* | UC* (height x width x length) | CARTON (height x width x length) | PALLETIZATION |
|----------------------|------------|--------------|-------------------|-------------------------------|----------------------------------|---------------|
| 10cm sleeve | 10 | 70724-001 | 8.412.131.672.193 | 6.5x6.5x9.6 | 13x10x40 | 98 Cartons |
| 23cm sleeve | 12 | 70724-002 | 8.412.131.672.209 | 7x7x22.5 | 25.5x25x38 | 45 Cartons |
| 10cm handle | 20 | 70725-001 | 8.412.131.672.216 | 26x11x3.5 | 30x15.5x39 | 48 Cartons |
| 23cm handle | 20 | 70725-002 | 8.412.131.672.223 | 28x23.5x3 | 30x15.5x39 | 48 Cartons |
| 10cm complete roller | 20 | 70726-001 | 8.412.131.672.230 | 40x11.3x7 | 40x21x40 | 30 Cartons |
| 23cm complete roller | 12 | 70726-002 | 8.412.131.672.247 | 30.5x26.5x3 | 40x21x40 | 24 Cartons |

Beissier

Beissier S.A.U.

Txirrita Maleo 14
E-20100 Errenteria
Tel.: (34) 943 344 070
beissier@beissier.es

www.beissier.com



Rev. 01-2025