

# Beissier

Providing solutions since 1930.

## AGUAPLAST®

Walls better than new





## Index

|    |                                |           |
|----|--------------------------------|-----------|
| 01 | <b>Beissier</b>                | <b>03</b> |
| 02 | <b>AGUAPLAST®</b>              | <b>10</b> |
|    | 2.1. MULTIPURPOSE              | 11        |
|    | 2.2. WALL RENOVATION           | 15        |
|    | 2.3. SKIM COATING              | 19        |
|    | 2.4. FILLING                   | 22        |
|    | 2.5. REPAIRING                 | 25        |
|    | 2.6. WOOD & TIMBER             | 34        |
| 03 | <b>Renovation Specialities</b> | <b>38</b> |
| 04 | <b>Selection Guide</b>         | <b>43</b> |
| 05 | <b>Quick Guide</b>             | <b>46</b> |

## 01 **Beissier**

**90 YEARS OF ACCUMULATED EXPERIENCE.** Since foundation in 1871, the Beissier brand has always stood out for the development of innovative solutions for improving aesthetics, comfort and efficiency in buildings. Beissier has over 90 years of experience and collaboration with paint professionals, actively listening to their needs and contributing with pioneering solutions for the preparation and repair of backgrounds. Today it is a robust dynamic company, and their renowned brands are all benchmarks for plasterers, painters and decorators.

With extensive experience in Spanish and French markets, Beissier brands have been present in the main European markets since 1985, where they are renowned amongst professional painters and decorators and have positioned Beissier as the second largest filler manufacturer in Europe.

# Aguaplast

**AGUAPLAST was founded in 1944 as the first brand of fillers on the Spanish market. It soon became market leader and the domestic market benchmark on account of sales and reputation. Now, after over 75 years, AGUAPLAST not only remains the unrivalled leader on the domestic market, but has also become a benchmark in many major European markets and already boasts operations in 3 continents.**

In keeping with the organization's cutting-edge spirit and tradition, Beissier/Aguaplast is always making progress with regard to the environment. In light of this concern and the ongoing development in this field, Aguaplast prides itself on being the first European filler

brand to obtain an EPD. This is a significant milestone that marks the organization's present and future. We are confident that the future of our companies will bring a more environmentally friendly future for generations to come.



# Renovation Specialities

The problems faced by professional decorators and contractors in their day-to-day work are varied and not always easy to solve. One of the most common is the lack of prepared substrates to be painted...

Beissier leads the Spanish and French domestic markets not only with fillers and plasters, but also with niche specialty renovation products, the best guarantee and proof for this new Beissier specific solutions for substrate renovation.

Beissier is now the benchmark for substrate renovation solutions.



# The first EPD for fillers in Europe



**An Environmental Product Declaration (EPD) provides the details of the environmental impact of products used in construction, based on a Life Cycle Analysis (LCA).**

As leader in the filler market, BEISSIER became the first European company in the sector to obtain an EPD in 2015. Accordingly, it provides painters and construction professionals with all details regarding the life cycle of the product with a view towards demonstrating its commitment with the implementation of sustainable buildings around the world.

It is developed by the manufacturer based on standards ISO 14025, ISO 14044 and PCR 2012:01 (EN 15804:2012) and subsequently published - following an external certificate audit - on the platforms established for this purpose, with the most recognised being: Institut Bauen und Umwelt e.V (IBU), Environdec and Ecoplatform. EPDs are Type III declarations according to the International Standardisation Organisation.

Environmental Product Declarations are used in the construction sector to assess the life cycle of buildings and to compare different products used for the same purpose, analysing product life cycles.

**EPDs are essential for obtaining sustainable construction certificates such as LEED, BREEAM, WELL, DGNB or HQE® and are in increasing demand for the execution of public and private works projects.**

AGUAPLAST, and Beissier as a manufacturer, accordingly set a course towards a more sustainable world some years ago and today we continue to make progress on this course with the clear goal of respecting the environment, the planet, and therefore the people living on it.

# Universal PRO

The all round filler

It should be pointed out that amongst others, Universal Pro, as the most important in the range of AGUAPLAST fillers, has already received the relevant EPD certificate.



# Multipurpose products

Universal fillers for covering a wide range of applications with a single product and best performance. Designed with the professional in mind.

**Universal PRO**  
**Universal MIX**  
**All 4 in**

Renovation of painted surfaces.



**Universal PRO**  
**Universal MIX**  
**All 4 in**

Filling of small holes & cracks.



**Universal FASSADE**

Direct application on interior humid areas such as bathrooms or kitchens.



## Universal PRO


- Filling holes & cracks up to 50 mm.
- Levelling & finishing surfaces.
- Renovation of painted surfaces.
- Joint filling and finishing.



Interior



Powder



White



## Universal MIX


- Levelling & finishing surfaces.
- Renovation of painted surfaces.
- Filling of small holes & cracks up to 5 mm.
- Joint filling and finishing.



Interior



Ready mix



Light grey



Lightweight

**Universal PRO  
Universal MIX  
All 4 in**

Joint filling and finishing.



**Universal PRO**

Filling of holes & cracks up to 50 mm.



**Universal PRO  
Universal MIX  
All 4 in**

Levelling & finishing surfaces.



**Universal FASSADE**

Filling of small holes & cracks up to 5 mm.



**Universal FASSADE**

Levelling & finishing surfaces.



**Universal FASSADE**

Renovation of painted exterior walls.




**All 4 in**


- Levelling & finishing surfaces.
- Renovation & finishing of painted surfaces.
- Joint filling and finishing.
- Filling small holes and cracks.



Interior




Ready mix




White

**Universal FASSADE**

- Renovation of painted exterior walls.
- Exterior surface levelling & finishing.
- Filling of small holes up to 5 mm.
- Direct application on interior humid areas such as bathrooms or kitchens.




Exterior/Interior



Ready mix



Grey



Lightweight

## 02 AGUAPLAST®

We present our Aguaplast fillers range updated offering an alternative to the market to each product/solutions detected in our more than 80 years long history.

### MULTIPURPOSE

Universal PRO  
 Universal MIX  
 All 4 in  
 Universal FASSADE

### WALL RENOVATION

Express  
 Rapid FASSADE  
 Renova Joint  
 Renovation

### SKIM COATING

Super Fine  
 Standard Professional  
 Top Finish

### FILLING

Top Fill  
 Lite Fill  
 Rapid Fill

### REPAIRING

Super Repair  
 Beton Repair  
 Rapiduro  
 Fibra  
 Flex Fill  
 Exterior  
 Fill & Finish  
 Spray Filler  
 Instant

### WOOD & TIMBER

Woodfiller  
 Wood Repair Filler  
 Woodfinisher  
 Super Contact



## 2.1 Multipurpose

# AGUAPLAST® Universal PRO

The all round filler




### USAGES:

- Filling of holes and cracks up to 50 mm.
- Levelling-up, smoothing and finishing of surfaces.
- Renovation of painted surfaces.
- Plasterboards: Joint filling and finishing, allowing plasterboard finish to any surface quality level.

### CHARACTERISTICS:

- Multi-purpose gypsum filler for interiors. The essential product in the equipment of professional painters.
- Quick and easy to mix and prepare.
- Easy to trowel, comfortable to apply, excellent yield.
- Allows wet on wet recoat.
- Dries and hardens quickly.
- Its low degree of absorption guarantees higher coverage and performance of the paint.
- Easy to sand.
- No shrinkage or cracking.
- Excellent bonding, even on satin paints, old fibreglass wall coverings and other non-absorbent substrates.
- Classification according to EN 13963: Type 4B.

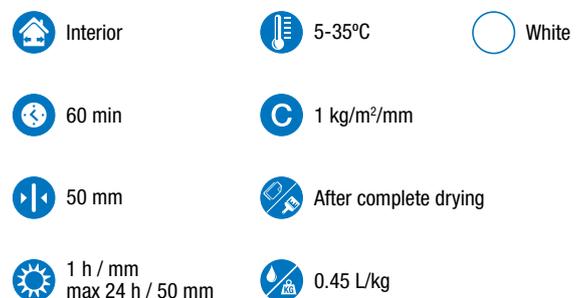

| Packaging  | Product Code | Palletization |
|------------|--------------|---------------|
| Sack 5 kg  | 70082-002    | 140 Sacks     |
| Sack 20 kg | 70082-001    | 50 Sacks      |

## 2.1 Multipurpose

# AGUAPLAST® Universal MIX

Lightweight ready mixed filler



### USAGES:

- Surface levelling and finishing.
- Renovation of painted surfaces.
- Filling of small holes and cracks up to 5mm.
- Plasterboards: Joint filling and finishing, allowing plasterboard finish to any surface quality level.

### CHARACTERISTICS:

- Light and easy to apply, without effort.
- Quick drying.
- Easy to sand.
- Applicable mechanically with airless spray equipment.
- Excellent bonding, even on satin paints, uneven surfaces or old fibreglass coverings, painted or not.
- Applicable up to 5 mm thick without cracking. Low shrinkage.
- Classification in accordance with EN 13963: Type 3A.



Interior



5-35°C



No limit



1.1 kg/m<sup>2</sup>/mm



5 mm



After complete drying



12 h/mm



Light grey

| Packaging   | Product Code | Unit Carton | Palletization |
|-------------|--------------|-------------|---------------|
| Bucket 4 L  | 70081-002    | 4           | 36 Cartons    |
| Bucket 10 L | 70081-001    | -           | 44 Buckets    |

## 2.1 Multipurpose

# AGUAPLAST® All 4 in

Allround ready mixed filler for interior application



### USAGES:

- Renovating on most interior painted substrates.
- Levelling of rough surfaces.
- Skim coating: Ensures a fine and low absorbent surface.
- Plasterboards: Joint filling and finishing, allowing plasterboard finish to any surface quality level.

### CHARACTERISTICS:

- Can be applied in thick coats up to 6 mm.
- Smooth application and easy sanding.
- Can be applied by trowel/blade, roller, airless machines and bazooka taping and finishing equipments.
- Very fine and white finish.
- Can be overcoated with any kind of paint.



Interior



5-35°C



No limit



1.75 kg/m<sup>2</sup>/mm



6 mm



After complete drying



24 h/mm



White

| Packaging    | Product Code | Palletization |
|--------------|--------------|---------------|
| Bucket 15 kg | 70530-002    | 44 Buckets    |
| Bucket 25 kg | 70530-001    | 33 Buckets    |



## 2.1 Multipurpose

# AGUAPLAST®

# Universal FASSADE

## Lightweight ready mixed filler for exteriors



### USAGES:

- Renovation of painted exterior walls.
- Exterior surface levelling and finishing.
- Filling of small holes up to 5 mm.
- Direct application on tiles and ceramics in humid areas such as bathrooms or kitchens.

### CHARACTERISTICS:

- Finer and less absorbent finishing than traditional cement based products.
- Excellent spread.
- Fast drying and very easy sanding.
- Excellent bonding even on non absorbent substrates such as glazed tiles, glass ceramics, painted facades etc.
- Water and humidity resistant.
- Resistant to mold growth and microorganism.
- Water vapour permeable.



Interior/Exterior



5-35°C



No limit

1.2 kg/m<sup>2</sup>/mm

5 mm



After complete drying



12 h/mm



Light grey


| Packaging   | Product Code | Palletization |
|-------------|--------------|---------------|
| Bucket 10 L | 70079-001    | 44 Buckets    |



## 2.2 Wall renovation

# AGUAPLAST® Express

Interior quick dry filler

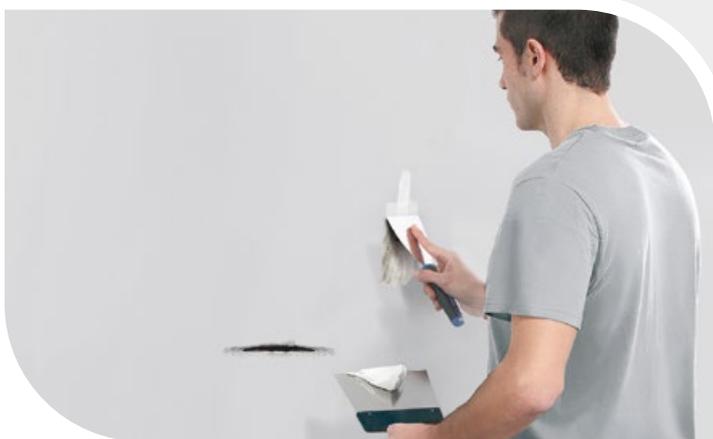

**USAGES:**

- Filling holes and cracks of up to 5 cm.
- Direct renovation of all type of substrates including non absorbents such us glossy paints, tiles, ceramics etc.
- Renovation of humid interior areas like bathrooms and kitchens.
- Smoothing and levelling out of walls and ceilings.

**CHARACTERISTICS:**

- “Express” drying: Can be sanded and covered as early as after 3 hours.
- Great filling capacity: Up to 50 mm thickness without shrinkage.
- Allows wet on wet recoat. The second layer, if required, can be applied before the first application is completely dry.
- Very easy and comfortable mixing and sanding.

|          |                         |       |
|----------|-------------------------|-------|
| Interior | 5-35°C                  | White |
| 45 min   | 1 kg/m <sup>2</sup> /mm |       |
| 50 mm    | 3 h                     |       |
| 3 h      | 0.45 L/kg               |       |

| Packaging  | Product Code | Unit Carton | Palletization |
|------------|--------------|-------------|---------------|
| Box 1 kg   | 70219-002    | 10          | 63 Cartons    |
| Box 4 kg   | 70219-001    | 4           | 28 Cartons    |
| Sack 15 kg | 70219-004    | -           | 48 Sacks      |

## 2.2 Wall renovation

# AGUAPLAST®

# Rapid FASSADE

## Quick dry façade levelling and renovating filler



### USAGES:

- Renovation of painted exterior walls.
- Levelling and smoothing exterior substrates.
- Filling of holes and cracks.

### CHARACTERISTICS:

- Cement based powder filler.
- Very fast drying, sanding possible after 4 hours and overcoating after only 12 hours.
- Very good bonding to non-absorbent substrates including: painted facades, tiled facades, acrylic façade plasters, stonework tiling, etc.
- Fine white finish which facilitates the painting process.
- Allows wet on wet recoat. The second layer, if required, can be applied before the first is completely dry.
- Allows application in thick layers without cracking or shrinking.




Interior/Exterior




5-35°C



45 min

1 kg/m<sup>2</sup>/mm

4 mm



Sandable: after 4 h

Overcoating: after 12 h



0.35 L/kg



White

| Packaging  | Product Code | Palletization |
|------------|--------------|---------------|
| Sack 5 kg  | 70054-001    | 140 Sacks     |
| Sack 15 kg | 70054-002    | 48 Sacks      |



## 2.2 Wall renovation

# AGUAPLAST® Renova Joint

## Tile grout



### USAGES:

- Renovating and refreshing old tile joints.
- Ideal for kitchens and bathrooms.
- Interior and exterior use.

### CHARACTERISTICS:

- Deep white finish.
- Water, humidity & mould resistant.
- Excellent adhesion to all kind of substrates.



Interior/Exterior



24 h



No limit



5-35°C



3 mm



White

| Packaging   | Product Code | Unit Carton | Palletization |
|-------------|--------------|-------------|---------------|
| Tube 200 ml | 70477-001    | 12          | 100 Cartons   |

## 2.2 Wall renovation

# AGUAPLAST® Renovation

## Strong adhesion renovation filler



### USAGES:

- Direct renovation on non-absorbent substrates: fibreglass wall coverings, textured surfaces, satin or gloss painted surfaces, old coats of oil-based paint, etc. No need to remove them.
- Levelling out and finishing of rough surfaces, old plaster, after removing wallpaper, etc.

### CHARACTERISTICS:

- Outstanding bonding.
- Allows wet on wet recoat.
- Good filling capacity up to 15 mm.
- Very fine finish.
- Perfect spread, good trowelling properties.
- Easy to sand.



Interior



5-35°C




White



2 h

1 kg/m<sup>2</sup>/mm

15 mm



After complete drying



12 h / 3 mm



0.5 L/kg



| Packaging  | Product Code | Palletization |
|------------|--------------|---------------|
| Sack 15 kg | 70502-001    | 48 Sacks      |
| Sack 25 kg | 70502-003    | 40 Sacks      |

## 2.3 Skim coating

# AGUAPLAST® Super Fine

Extra fine surface filler



### USAGES:

- Ideal for high quality smooth finishes.
- Final coat for large plastered surfaces.
- Final preparation (Q4) of drywall and plasterboard.
- Fully recommended for covering with gloss or satin paints and wallpapers.

### CHARACTERISTICS:

- Long working time of 24 hours. Allows mixing large quantities and saving time.
- Ensures a hard, cohesive, uniformly absorbing final finish.
- Effortless application.
- Easy to sand.



- Interior
- 5-35°C
- White
- 24 h
- 1 kg/m<sup>2</sup>/mm
- 2 mm
- After complete drying
- 30 min / 0.2 mm  
24 h / 2 mm
- 0.5 L/kg

| Packaging  | Product Code | Palletization |
|------------|--------------|---------------|
| Sack 5 kg  | 70501-002    | 140 Sacks     |
| Sack 15 kg | 70501-001    | 48 Sacks      |
| Sack 25 kg | 70501-003    | 40 Sacks      |

## 2.3 Skim coating

AGUAPLAST®

# Standard Professional

Fine surface ready mixed skim-coat



### USAGES:

- Ideal for high quality smooth finishes.
- Final coat for large plastered surfaces.
- Final preparation (Q4) of drywall and plasterboard.
- Fully recommended for covering with gloss or satin paints and wallpapers.

### CHARACTERISTICS:

- Extremely fine particle size.
- Thixotropic paste in a very easy-to-apply gel form.
- Very easy to sand.
- Reduces the absorption of the substrate allowing significant savings in paint.



Interior



5-35°C



No limit



1.75 kg/m<sup>2</sup>/mm



2 mm



After complete drying



24 h/mm



White

| Packaging    | Product Code | Palletization |
|--------------|--------------|---------------|
| Bucket 15 kg | 70068-003    | 44 Buckets    |
| Bucket 25 kg | 70499-001    | 33 Buckets    |

## 2.3 Skim coating

# AGUAPLAST®

# Top Finish

## Ready mixed fine surface filler



### USAGES:

- Ideal for minor surface repairs: small holes, scratches, etc.
- Applicable on absorbent surfaces.
- Enhance the paint finish.

### CHARACTERISTICS:

- Provides a smooth and fine finish.
- Excellent adhesion to plaster, plasterboard, old paint substrates, concrete, cement or primed wood.
- Does not crack on the recommended layer thickness.
- Easy to apply and sand.
- Smooth smell to lavender.



Interior



5-35°C



No limit

1.75 kg/m<sup>2</sup>/mm

2 mm



After complete drying



24 h/mm



White



| Packaging   | Product Code | Unit Carton | Palletization |
|-------------|--------------|-------------|---------------|
| Bucket 1 kg | 70480-001    | 12          | 54 Cartons    |
| Bucket 5 kg | 70480-002    | 4           | 36 Cartons    |

## 2.4 Filling

# AGUAPLAST® Top Fill

Ready mixed deep filler



Bucket 1 kg

### USAGES:

- Filling holes and cracks on interior walls.
- Can be applied on plaster, plasterboard, gypsum board, concrete, cellular concrete, cement, polystyrene, primed wood, old paint substrates, etc.

### CHARACTERISTICS:

- Fills up to 10 mm.
- Resists shrinking and slumping.
- Excellent adhesion on absorbent substrates.
- Easy to apply and sand.



Interior



5-35°C



No limit



1.4 kg/m<sup>2</sup>/mm



10 mm



After complete drying



12 h/mm



White

| Packaging   | Product Code | Unit Carton | Palletization |
|-------------|--------------|-------------|---------------|
| Bucket 1 kg | 70479-001    | 12          | 54 Cartons    |

## 2.4 Filling

# AGUAPLAST® Lite Fill

Lightweight filler



### USAGES:

- Filling holes and cracks on interior and exterior walls.
- Repairs moulding of plaster, polystyrene, wood, etc.
- Ideal for filling holes in ceilings.
- Filling skirting board-wall joints, etc.

### CHARACTERISTICS:

- Single-pass filling.
- No shrinking or cracking in thick layers.
- Excellent adhesion.
- Dries quickly.
- No sanding required.




Interior/Exterior



5-35°C



No limit



After complete drying



No limit



White



2-24 h

| Packaging     | Product Code | Unit Carton | Palletization |
|---------------|--------------|-------------|---------------|
| Bucket 250 ml | 70475-001    | 12          | 98 Cartons    |
| Bucket 750 ml | 70475-002    | 12          | 54 Cartons    |
| Bucket 4 L    | 70475-003    | 4           | 36 Cartons    |

## 2.4 Filling

# AGUAPLAST® Rapid Fill

Quick dry exterior lightweight filler



### USAGES:

- Filling holes and cracks on exterior walls.
- Can be applied on concrete, cellular concrete, cement, concrete blocks, bricks, wood, etc.

### CHARACTERISTICS:

- Concrete-like rough finish.
- Can be applied in any thickness.
- No shrinking or cracking.
- Touch dry after 30'.
- Excellent adhesion.
- Fibreglass reinforced.

- Interior/Exterior
- 5-35°C
- No limit
- 1.3 kg/m<sup>2</sup>/mm
- No limit
- After complete drying
- 30 min
- Grey

| Packaging   | Product Code | Unit Carton | Palletization |
|-------------|--------------|-------------|---------------|
| Bucket 1 kg | 70056-004    | 12          | 54 Cartons    |

## 2.5 Repairing

# AGUAPLAST®

# Super Repair

## Quick dry all-round exterior filler



### USAGES:

- Reprofilling and shaping of cornices, edges, balconies, columns, pillars, etc. without formwork.
- Rebuilding of decorative elements and volumes of facades, statues, etc.
- Filling of holes and cracks of any size.
- Fixing and covering on all types of substrates.

### CHARACTERISTICS:

- Cement based powder filler.
- Quick drying and fast setting. Can be overcoated after 24 hours.
- Superb bonding strength onto all types of substrates.
- No thickness limitation. No shrinkage or crack.
- Can be easily cut, shaped and sculpted. Flexible.
- Shock resistant.



 Interior/Exterior

 5-35°C

 30 min

 1 kg/m<sup>2</sup>/mm

 No limit

 24 h

 0.4 L/kg

 White

| Packaging  | Product Code | Unit Carton  | Palletization  |
|------------|--------------|---|---|
| Box 1 kg   | 70222-001    | 10  | 63 Cartons  |
| Box 5 kg   | 70222-002    | 4   | 28 Cartons  |
| Sack 15 kg | 70222-003    | -   | 48 Sacks  |

## 2.5 Repairing

# AGUAPLAST® Beton Repair

## Waterproof filler



### USAGES:

- Waterproofing of walls and partitions, including marine or extremely humid environments: basements, water tanks, etc.
- Repair and renovation of reinforced concrete elements.
- Reprofiling and repair of exterior elements (balconies, cornices, etc.).
- Fixing posts, drains, handrails and swimming pools maintenance.

### CHARACTERISTICS:

- Cement based powder filler
- Waterproof in 3 mm thickness.
- Resistant to carbonation.
- Permeable to water vapour and CO<sub>2</sub>.
- Resistant to seawater, barrier to saltpetre.
- Applicable directly on damp surfaces.
- Filling capacity up to 15 mm without formwork.
- Can be painted after 48 hours.



Interior/Exterior



5-30°C



30 min

1,2 kg/m<sup>2</sup>/mm

15 mm



48 h



0.25 L/kg



Grey



| Packaging  | Product Code | Unit Carton | Palletization |
|------------|--------------|-------------|---------------|
| Box 5 kg   | 70218-001    | 4           | 28 Cartons    |
| Sack 15 kg | 70218-003    | -           | 48 Sacks      |

## 2.5 Repairing

AGUAPLAST®

# Rapiduro

Quick-set fixing cement



### USAGES:

- Ideal for fixing posts, drains, handrails, etc. on masonry substrates.
- Stops leaking water.
- Can be applied on concrete, cellular concrete, cement, concrete blocks, bricks, etc. even if damp.

### CHARACTERISTICS:

- Sets hard in only 10 minutes, even under water.
- May be subjected to efforts after 20 minutes.
- Resistant to water and saltpeter.



Interior/Exterior




5-30°C



Grey



5 min



1 kg/m<sup>2</sup>/mm



No limit



48 h



24 h



0.3 L/kg

| Packaging | Product Code | Unit Carton | Palletization |
|-----------|--------------|-------------|---------------|
| Box 1 kg  | 70221-001    | 10          | 63 Cartons    |
| Box 5 kg  | 70221-002    | 4           | 28 Cartons    |

## 2.5 Repairing

# AGUAPLAST® Fibra

## Flexible crack repair filler



### USAGES:

- Sealing and bridging of moving cracks and reoccurring fissures.
- Sealing of wood or timber panels.
- Can be applied on concrete, cement, plaster, gypsum boards, wood, old paint substrates.

### CHARACTERISTICS:

- Excellent adhesion.
- Highly flexible.
- Recommended layer thickness up to 3mm.
- Fibreglass reinforced for moving cracks.
- Waterproof.



Tube 200 ml

Bucket 750 ml

Bucket 4 kg




Interior/Exterior



5-35°C



No limit



1.2 kg/m²/mm



3 mm



After complete drying



2-24 h



White

| Packaging     | Product Code | Unit Carton | Palletization |
|---------------|--------------|-------------|---------------|
| Tube 200 ml   | 70471-001    | 12          | 100 Cartons   |
| Bucket 750 ml | 70471-002    | 12          | 54 Cartons    |
| Bucket 4 kg   | 70471-003    | 4           | 36 Cartons    |

## 2.5 Repairing

# AGUAPLAST® Flex Fill

## Exterior crack sealing compound



### USAGES:

- Filling and sealing of moving cracks and reoccurring fissures.
- Suitable to prevent water infiltration on floors.

### CHARACTERISTICS:

- Excellent adhesion to masonry substrates.
- Flexible between -10 and +70°C.
- Recommended layer thickness up to 10mm.
- Fiberglass reinforced.
- Concrete-like rough finish.
- Waterproof.



Interior/Exterior



5-35°C




No limit



1.5 kg/m²/mm



5-10 mm



After complete drying



12 h/mm



Grey

| Packaging   | Product Code | Unit Carton | Palletization |
|-------------|--------------|-------------|---------------|
| Bucket 1 kg | 70473-001    | 12          | 54 Cartons    |
| Bucket 5 kg | 70473-002    | 4           | 36 Cartons    |

## 2.5 Repairing

# AGUAPLAST® Exterior

## Exterior repair white filler



### USAGES:

- Filling and leveling on masonry substrates: Concrete, fine-grain concrete, cellular concrete, concrete block, cement, brick, etc.
- Suitable for damp substrates.

### CHARACTERISTICS:

- Cement based exterior filler.
- Easy to use.
- Long working time.
- Can be overcoated after 48 h.
- Provides a fine white hard surface.




Interior/Exterior



5-30°C



2 h

1.5 kg/m<sup>2</sup>/mm

5 mm



48 h



0.3 L/kg



White



| Packaging  | Product Code | Unit Carton | Palletization |
|------------|--------------|-------------|---------------|
| Box 1.5 kg | 70220-002    | 10          | 45 Cartons    |
| Box 6 kg   | 70220-001    | 4           | 28 Cartons    |

## 2.5 Repairing

# AGUAPLAST® Fill & Finish

Reparation and finishing interior powder filler



### USAGES:

- Filling of holes and cracks.
- Levelling and finishing of absorbent substrates such as plaster, plasterboards, beton, beton blocks, bricks, ... .

### CHARACTERISTICS:

- Gypsum based powder filler.
- Filling capacity up to 30 mm.
- Easy and smooth mixing and sanding.
- Provides a white fine finish.



Interior



5-35°C




White



1 h

1 kg/m<sup>2</sup>/mm

30 mm



After complete drying



1 h/mm



0.5 L/kg

| Packaging | Product Code | Unit Carton | Palletization |
|-----------|--------------|-------------|---------------|
| Box 1 kg  | 70472-002    | 10          | 63 Cartons    |
| Box 5 kg  | 70472-001    | 4           | 28 Cartons    |

## 2.5 Repairing

# AGUAPLAST® Spray Filler

Interior spray filler



### USAGES:

- Quick and easy application.
- Filling small cracks, holes and gaps.
- Ideal for minor surface repairs: small holes, scratches, etc.

### CHARACTERISTICS:

- Excellent adhesion to plaster, concrete, wood, old painted surfaces, etc.
- One coat application, does not shrink.
- Flexible & easy to sand.
- Quick drying: can be overcoated after 24 h.



Interior



10-35°C



No limit



After complete drying



3 mm



White



12 h/mm



| Packaging    | Product Code | Unit Carton | Palletization |
|--------------|--------------|-------------|---------------|
| Spray 250 ml | 70579-002    | 6           | 145 Cartons   |

## 2.5 Repairing

AGUAPLAST®

# Instant

Quick dry ready mixed filler



### USAGES:

- Ideal for minor surface repairs: scratches, screw and nail holes etc. on walls and ceilings.
- Allows rapid overcoating.

### CHARACTERISTICS:

- Excellent adhesion to most building substrates.
- Water and humidity resistant.
- Fine and white finish.



Interior/Exterior



5-35°C




No limit



1.55 kg/m<sup>2</sup>/mm



3 mm



After complete drying



15 min



White



| Packaging   | Product Code | Unit Carton | Palletization |
|-------------|--------------|-------------|---------------|
| Tube 200 ml | 70474-001    | 12          | 100 Cartons   |

## 2.6 Wood & Timber

# AGUAPLAST® Woodfiller

Fibreglass reinforced



**USAGES:**

- Filling and repairing holes and gaps on wood and timber surfaces.
- Ideal for restoring wooden furniture.
- Filling holes and cracks on doors, windows frames, skirting boards & floor boards.

**CHARACTERISTICS:**

- Fills up to 5 mm.
- Reinforced with fibreglass. Copes with up to 20 movement in wood.
- Resists shrinking.
- Solvent free.
- Can be overcoated with most varnishes and wood stains.
- Wide range of colours available.

- 🏠 Interior/Exterior
- ☀️ 1-4 h
- Ⓢ 1.4 kg/m<sup>2</sup>/mm
- 🕒 No limit
- 🌡️ 5-35°C
- 📏 5 mm
- 🔧 After complete drying

| Packaging   | Color      | Code      | Unit Carton | Palletization |
|-------------|------------|-----------|-------------|---------------|
| Tube 125 ml | Beech      | 70481-007 | 12          | 144 Cartons   |
|             | Cherry     | 70481-006 |             |               |
|             | Dard oak   | 70481-017 |             |               |
|             | Mahogany   | 70481-005 |             |               |
|             | Neutral    | 70481-002 |             |               |
|             | Oak        | 70481-004 |             |               |
|             | Pine       | 70481-001 |             |               |
|             | Rustic oak | 70481-016 |             |               |
|             | Sapele     | 70481-008 |             |               |
|             | Teak       | 70481-009 |             |               |
|             | Walnut     | 70481-003 |             |               |
|             | Wenge      | 70481-010 |             |               |
| Bucket 1 kg | Neutral    | 70481-015 | 12          | 54 Cartons    |
|             | Oak        | 70481-014 |             |               |
|             | Pine       | 70481-012 |             |               |
|             | Walnut     | 70481-013 |             |               |

## 2.6 Wood & Timber

AGUAPLAST®

# Wood Repair Filler

Powder wood filler



### USAGES:

- Repairing and filling gaps on wood and timber.
- Reprofilling and shaping of wooden furniture.
- Repairing broken angles.
- Reconstitute missing wood due to decay.

### CHARACTERISTICS:

- Filling up to 50 mm.
- Easy to shape and smooth after setting.
- Quick drying.
- Allows sanding and overcoating after 3 hours.
- Excellent adhesion.
- Reinforced with fibres.
- Can be overcoated with most paints and varnishes for wood treatment.



| Packaging | Product Code | Unit Carton | Palletization |
|-----------|--------------|-------------|---------------|
| Box 1 kg  | 70608-002    | 10          | 63 Cartons    |

## 2.6 Wood & Timber

# AGUAPLAST® Woodfinisher

## Wood smoothing fine filler




### USAGES:

- To cover wooden surfaces before enameling, lacquering or varnishing.
- May be applied on exterior timber and wood if conveniently protected with an exterior grade top coat.

### CHARACTERISTICS:

- Extremely fine and white finish.
- Flexible.
- Solvent Free.
- Provides a good protection against corrosion.
- Reduced absorption of the lacquer or varnish top coat.



| Packaging      | Product Code | Unit Carton | Palletization |
|----------------|--------------|-------------|---------------|
| Tube 350 gr    | 70084-001    | 12          | 100 Cartons   |
| Bucket 1.25 kg | 70084-002    | 12          | 54 Cartons    |

## 2.6 Wood & Timber

# AGUAPLAST® Super Contact

All-purpose adhesive filler



### USAGES:

- Adhesive for quick and long lasting fixing of wooden skirting boards, carpets, gutters, rigid PVC, cork, ceramics, mouldings, etc.

### CHARACTERISTICS:

- Ready-to-use
- Solvent-free.
- At least one substrate must be absorbent, so that the adhesive can dry.
- Complete adhesive strength is achieved after 24 hours.



Interior



5-35°C



24 h



White

| Packaging   | Product Code | Unit Carton | Palletization |
|-------------|--------------|-------------|---------------|
| Tube 200 ml | 70478-001    | 12          | 100 Cartons   |

## 03 Renovation Specialities

We launch for the very first time in international markets an additional range to our Aguaplast fillers to keep strengthening our position as a comprehensive supplier of solutions when it comes to preparing walls before the final decorative touch.

### RENOVATION SPECIALITIES

Beissier Chameleon

Beissier Chameleon Spray


Fixacryl Spray

Dry Wall Primer



# Beissier Chameleon

Multi-surface primer & finisher & stain covering paint

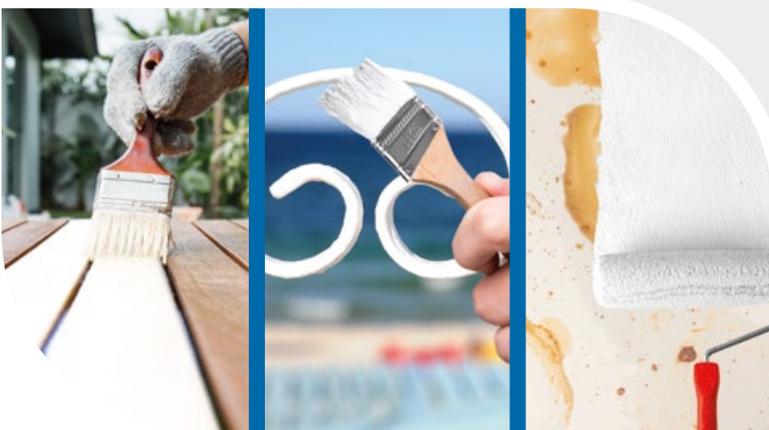

## USAGES:

- Primer and finishing coat.
- Bonding bridge for low adhesion substrates like metallic surfaces (iron, zinc, galvanized iron, aluminum, lead, brass, copper...), plastics, rigid PVC, polyester, fiberglass polyester, methacrylate, melamine, expanded polyurethane, ceramics, mosaic, glass, etc.
- Good stain blocking properties on grease, soot, ink, damp stains, nicotine, coffee, etc.
- Isolates and seals pore on wood and timber.

## CHARACTERISTICS:


- Water based.
- Excellent adhesion to multiple substrates: metal, plastic, ceramic, wood, etc.
- Rust inhibitor on metallic surfaces.
- Quick drying. Non-yellowing.
- Regulates substrate porosity.
- Heat resistant up to 100°C.
- Can be overcoated with all types of traditional wall & ceiling paints.
- White semi-matt finish.




Interior/Exterior



5-35°C




Touch dry 30 min



Brush/Roller: 10-12 m<sup>2</sup>/L  
Airless gun: 6-8 m<sup>2</sup>/L



Semi matt



Water-based paints: 4-6 h  
Solvent: 24 h  
Polyurethane / epoxy: 48 h

| Packaging     | Transparent | White     | Unit Packs | Palletization |
|---------------|-------------|-----------|------------|---------------|
| Bucket 600 ml | 70600-002   | -         | 6          | 112 Packs     |
| Bucket 750 ml | -           | 70600-001 | 6          | 112 Packs     |
| Bucket 2 L    | -           | 70600-003 | 2          | 105 Packs     |

# Beissier Chameleon Spray

## Multi-surface primer & finisher



### USAGES:

- Primer and finishing coat.
- Apply on difficult surfaces: metallic, plastics, rigid pvc, wood, ceramics, galvanized iron, glass, etc.
- Isolates and seals pore on wood and timber., ideal to restore wood furniture.

### CHARACTERISTICS:

- Anti-corrosive protection for metallic surfaces.
- Can be overcoated with any water or solvent based paint.
- Excellent adhesion and self-levelling.
- Quick drying. Touch dry in 30'.
- Heat resistant up to 100°C.
- Matt finish.
- Adjustable nozzle for a easy and flexible application.



Interior/Exterior



5-35°C



Touch dry 30 min



2-2.5 m²/400 ml



Matt

Water-based paints /  
Synthetic enamels: 2h  
Polyurethane / epoxy: 36 h

White



| Packaging    | Product Code | Unit Carton | Palletization |
|--------------|--------------|-------------|---------------|
| Spray 400 ml | 70600-005    | 6           | 116 Cartons   |

# Fixacryl Spray

Waterbased priming & sealing spray



Spray 400 ml

## USAGES:

- Seals absorbent substrates: cement, concrete, plaster, lime mortars, old painted walls.
- Hardens chalky and feeble surfaces.
- Improves adhesion of paints and other wall coverings.

## CHARACTERISTICS:

- Water-based.
- Easy to apply.
- Quick drying. Touch dry in 30'.
- Seals and stabilises porous substrates.
- Improves scrubability of interior paints.



Interior/Exterior



5-35°C



Touch dry 20-30 min



12 m<sup>2</sup>/400 ml



Transparent



24 h

| Packaging    | Product Code | Unit Carton | Palletization |
|--------------|--------------|-------------|---------------|
| Spray 400 ml | 70237-008    | 6           | 145 Cartons   |

# Dry Wall Primer

Waterbased white primer ideal for plasterboard and new plaster



EU Ecolabel: ES-EU/044/00007

NEW



## USAGES:

- Regulates surface porosity across multiple substrates: Plasterboard, plaster, concrete, cement, concrete blocks, bricks, old painted substrates, etc.

## CHARACTERISTICS:

- Improves adhesion of paints and other wall coverings.
- Opacifying properties.
- Improves performance of interior paints.
- Smooth and easy application.
- Quick drying and overcoating.
- White.
- Matt finish.



Interior



5-35°C



Touch dry 1h



10-12 m²/L



Matt



White

| Packaging   | Product Code | Palletization |
|-------------|--------------|---------------|
| Bucket 4 L  | 70652-002    | 72 Buckets    |
| Bucket 15 L | 70652-001    | 33 Buckets    |

# Selection Guide Quick Guide



# 04 Selection Guide

## ▼ AGUAPLAST POWDER



|  | P.26                | P.15                      | P.30                   | P.31                     | P.16                                | P.27                    | P.18                              | P.19                      | P.25                                | P.11                 | P.35                      |
|--|---------------------|---------------------------|------------------------|--------------------------|-------------------------------------|-------------------------|-----------------------------------|---------------------------|-------------------------------------|----------------------|---------------------------|
|  | <b>Beton repair</b> | <b>Express</b>            | <b>Exterior</b>        | <b>Fill &amp; Finish</b> | <b>Rapid facade</b>                 | <b>Rapiduro</b>         | <b>Renovation</b>                 | <b>Super Fine</b>         | <b>Super repair</b>                 | <b>Universal PRO</b> | <b>Wood repair filler</b> |
|  | Waterproof filler   | Interior quick dry filler | Exterior Repair Filler | Interior Filler          | For levelling and smoothing façades | Quick-set Fixing Cement | Strong adhesion renovation filler | Extra fine surface filler | Quick Dry All-Round Exterior Filler | The all round filler | Powder Wood Filler        |

### APPLICATION

|                            |                           |                         |                           |                         |  |                         |                         |                               |                         |                           |                         |
|----------------------------|---------------------------|-------------------------|---------------------------|-------------------------|--|-------------------------|-------------------------|-------------------------------|-------------------------|---------------------------|-------------------------|
| Interior                   | •                         | •                       | •                         | •                       | •  | •                       | •                       | •                             | •                       | •                         | •                       |
| Exterior                   | •                         | ---                     | •                         | ---                     | •  | •                       | ---                     | ---                           | •                       | ---                       | •                       |
| <b>MAXIMUM THICKNESS</b>   | 15 mm                     | 50 mm                   | 5 mm                      | 30 mm                   | 4 mm   | No limit                | 15 mm                   | 2 mm                          | No limit                | 50 mm                     | 50 mm                   |
| <b>WORKING TIME</b>        | 30 min                    | 45 min                  | 2 h                       | 1 h                     | 45 min   | 5 min                   | 2 h                     | 24 h                          | 30 min                  | 60 min                    | 30 min                  |
| <b>DRYING TIME</b>         | ---                       | 3 h                     | ---                       | 1 h/mm                  | ---  | 24 h                    | 12 h / 3 mm             | 30 min / 0.2 mm - 24 h / 2 mm | ---                     | 1 h/mm - max 24 h / 50 mm | 3 h                     |
| <b>OVERCOATING</b>         | 48 h                      | 3 h                     | 48 h                      | After complete drying   | Sandable: after 4 hours<br>Overcoating: after 12 h | 48 h                    | After complete drying   | After complete drying         | 24 h                    | After complete drying     | After complete drying   |
| <b>MIXING PROPORTION</b>   | 0.25 L/kg                 | 0.45 L/kg               | 0.3 L/kg                  | 0.5 L/kg                | 0.35 L/kg  | 0.3 L/kg                | 0.5 L/kg                | 0.5 L/kg                      | 0.4 L/kg                | 0.45 L/kg                 | 0.4 L/kg                |
| <b>AVERAGE CONSUMPTION</b> | 1,2 kg/m <sup>2</sup> /mm | 1 kg/m <sup>2</sup> /mm | 1.5 kg/m <sup>2</sup> /mm | 1 kg/m <sup>2</sup> /mm | 1 kg/m <sup>2</sup> /mm                            | 1 kg/m <sup>2</sup> /mm | 1 kg/m <sup>2</sup> /mm | 1 kg/m <sup>2</sup> /mm       | 1 kg/m <sup>2</sup> /mm | 1 kg/m <sup>2</sup> /mm   | 1 kg/m <sup>2</sup> /mm |
| <b>COLOUR</b>              | Grey                      | White                   | White                     | White                   | White  | Grey                    | White                   | White                         | White                   | White                     | Light Brown             |

### ABSORBENT SUBSTRATES

|   |     |     |     |     |     |     |     |     |     |     |     |
|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Cement renders, smooth concrete, concrete mortars | ••• | ••• | ••• | ••• | ••• | ••• | ••• | ••• | ••• | ••• | --- |
| Blocks of concrete, cellular concrete             | ••• | ••• | ••• | ••• | ••• | ••• | ••• | •   | ••• | ••• | --- |
| Sand-lime and ceramic bricks                      | ••• | ••• | ••• | ••• | ••• | ••• | ••  | --- | ••• | ••• | --- |
| Plasterboard, gypsum tiles, plaster, gypsum       | --- | ••• | --- | ••• | ••• | --- | ••• | ••• | ••• | ••• | --- |
| Natural stone, stone cladding                     | ••• | ••• | ••• | ••  | ••• | ••• | ••  | •   | ••• | ••• | --- |
| Wood, timber, plywood, chipboard                  | --- | ••  | --- | ••  | ••• | --- | ••  | ••  | ••• | ••  | ••• |

### NON-ABSORBENT SUBSTRATES

|   |     |     |     |     |     |     |     |     |     |               |     |
|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|---------------|-----|
| Old coats of gloss, oil-based, satin paints | --- | ••• | --- | •   | ••• | --- | ••  | --- | ••• | after sanding | --- |
| Fibreglass wall coverings                   | --- | ••• | --- | •   | ••• | --- | ••• | •   | ••• | •••           | --- |
| Textured finished paints                    | --- | ••• | --- | •   | ••• | --- | ••• | --- | ••• | •••           | --- |
| Matt paints                                 | --- | ••• | --- | •   | ••• | --- | ••• | •   | ••• | •••           | --- |
| Glass blocks, glazed and glass tiles        | --- | ••• | --- | --- | ••• | --- | --- | --- | ••• | ---           | --- |

### FAÇADES

|                          |     |     |     |     |     |     |     |     |     |     |     |
|--------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Painted façades          | --- | --- | --- | --- | ••• | --- | --- | --- | ••• | --- | --- |
| External acrylic plaster | --- | --- | --- | --- | ••• | --- | --- | --- | ••• | --- | --- |
| Tiled façades            | --- | --- | --- | --- | ••• | --- | --- | --- | ••• | --- | --- |

### DAMP SUBSTRATES

|  |     |     |     |     |     |     |     |     |     |     |     |
|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|  | ••• | ••• | ••• | --- | ••• | ••• | --- | --- | ••• | --- | --- |
|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

## ▼ AGUAPLAST READY MIXED



| P.13                        | P.28                         | P.29                             | P.33                         | P.23                  | P.24                                  | P.17         | P.32                  | P.20                            | P.22                      | P.21                            | P.14                           | P.12                           | P.34                      | P.36                       |
|-----------------------------|------------------------------|----------------------------------|------------------------------|-----------------------|---------------------------------------|--------------|-----------------------|---------------------------------|---------------------------|---------------------------------|--------------------------------|--------------------------------|---------------------------|----------------------------|
| ALL4in                      | Fibra                        | Flex fill                        | Instant                      | Lite Fill             | Rapid Fill                            | Renova Joint | Spray Filler          | Standard Professional           | Top Fill                  | Top finish                      | Universal FASSADE              | Universal MIX                  | Woodfiller                | Woodfinisher               |
| Allround ready mixed filler | Flexible Crack Repair Filler | Exterior Crack Sealing Compound. | Quick Dry Ready Mixed Filler | Lightweight Filler    | Quick Dry Exterior Lightweight Filler | Tile Grout   | Interior Spray Filler | Fine surface ready-mixed filler | Ready Mixed Deep Filler   | Ready Mixed Fine Surface Filler | Lightweight ready mixed filler | Lightweight ready mixed filler | Fibreglass Reinforced.    | Wood Smoothing Fine Filler |
| •                           | •                            | •                                | •                            | •                     | •                                     | •            | •                     | •                               | •                         | •                               | •                              | •                              | •                         | •                          |
| ---                         | •                            | •                                | •                            | •                     | •                                     | •            | ---                   | ---                             | ---                       | ---                             | •                              | ---                            | •                         | •                          |
| 6 mm                        | 3 mm                         | 5-10 mm                          | 3 mm                         | No limit              | No limit                              | 3 mm         | 3 mm                  | 2 mm                            | 10 mm                     | 2 mm                            | 5 mm                           | 5 mm                           | 5 mm                      | 1 mm                       |
| No limit                    | No limit                     | No limit                         | No limit                     | No limit              | No limit                              | No limit     | No limit              | No limit                        | No limit                  | No limit                        | No limit                       | No limit                       | No limit                  | No limit                   |
| 24 h/mm                     | 2-24 h                       | 12 h/mm                          | 15 min                       | 2-24 h                | 30 min                                | 24 h         | 12 h/mm               | 24 h/mm                         | 12 h/mm                   | 24 h/mm                         | 12 h/mm                        | 12 h/mm                        | 1-4 h                     | 1-2 h                      |
| After complete drying       | After complete drying        | After complete drying            | After complete drying        | After complete drying | After complete drying                 | ---          | After complete drying | After complete drying           | After complete drying     | After complete drying           | After complete drying          | After complete drying          | After complete drying     | After complete drying      |
| ---                         | ---                          | ---                              | ---                          | ---                   | ---                                   | ---          | ---                   | ---                             | ---                       | ---                             | ---                            | ---                            | ---                       | ---                        |
| 1.75 kg/m <sup>2</sup> /mm  | 1.2 kg/m <sup>2</sup> /mm    | 1.5 kg/m <sup>2</sup> /mm        | 1.55 kg/m <sup>2</sup> /mm   | ---                   | 1.3 kg/m <sup>2</sup> /mm             | ---          | ---                   | 1.75 kg/m <sup>2</sup> /mm      | 1.4 kg/m <sup>2</sup> /mm | 1.75 kg/m <sup>2</sup> /mm      | 1.2 kg/m <sup>2</sup> /mm      | 1.1 kg/m <sup>2</sup> /mm      | 1.4 kg/m <sup>2</sup> /mm | 1.5 kg/m <sup>2</sup> /mm  |
| White                       | White                        | Grey                             | White                        | White                 | Grey                                  | White        | White                 | White                           | White                     | White                           | Light Grey                     | Light Grey                     | Colors                    | White                      |
| •••                         | •••                          | •••                              | •••                          | •••                   | •••                                   | ---          | ••                    | •••                             | ••                        | •••                             | •••                            | •••                            | ---                       | ---                        |
| •••                         | •••                          | •••                              | ••                           | •••                   | •••                                   | ---          | ••                    | ••                              | •••                       | ••                              | •••                            | •••                            | ---                       | ---                        |
| •••                         | •••                          | •••                              | •                            | •••                   | •••                                   | ---          | •                     | ••                              | •••                       | ••                              | •••                            | ••                             | ---                       | ---                        |
| •••                         | •••                          | •••                              | •••                          | •••                   | •••                                   | ---          | •••                   | •••                             | •••                       | •••                             | •••                            | •••                            | ---                       | ---                        |
| ••                          | •••                          | •••                              | •                            | •••                   | •••                                   | ---          | ••                    | •                               | ••                        | •                               | •••                            | ••                             | ---                       | ---                        |
| ••                          | •••                          | •••                              | ••                           | •••                   | •••                                   | ---          | •                     | ••                              | •••                       | ••                              | •••                            | ••                             | •••                       | •••                        |
| ••                          | •••                          | •••                              | ••                           | •••                   | •••                                   | ---          | •                     | ---                             | ---                       | ---                             | •••                            | after sanding                  | ---                       | ---                        |
| •••                         | •••                          | •••                              | ••                           | •••                   | •••                                   | ---          | •                     | •                               | •                         | •                               | •••                            | •••                            | ---                       | ---                        |
| •••                         | •••                          | •••                              | •                            | •••                   | •••                                   | ---          | •                     | ---                             | •                         | ---                             | •••                            | •••                            | ---                       | ---                        |
| •••                         | •••                          | •••                              | ••                           | •••                   | •••                                   | ---          | ••                    | •                               | •                         | •                               | •••                            | •••                            | ---                       | ---                        |
| ---                         | ---                          | ---                              | ---                          | ---                   | ---                                   | •••          | ---                   | ---                             | ---                       | ---                             | •••                            | ---                            | ---                       | ---                        |
| ---                         | •••                          | •••                              | ---                          | •                     | •••                                   | ---          | ---                   | ---                             | ---                       | ---                             | •••                            | ---                            | ---                       | ---                        |
| ---                         | •••                          | •••                              | ---                          | •                     | •••                                   | ---          | ---                   | ---                             | ---                       | ---                             | •••                            | ---                            | ---                       | ---                        |
| ---                         | ---                          | ---                              | ---                          | •                     | •                                     | ---          | ---                   | ---                             | ---                       | ---                             | •••                            | ---                            | ---                       | ---                        |
| ---                         | ---                          | ---                              | ---                          | ---                   | ---                                   | ---          | ---                   | ---                             | ---                       | ---                             | ---                            | ---                            | ---                       | ---                        |

••• Especially suitable product •• Good product • Possible use --- Recommended use

# 05 Quick Guide

## ▼ AGUAPLAST

| PRODUCT                         | POWDER OR READY MIXED | PACKAGE       | UC* CARTON | PRODUCT CODE | GENCOD UC*        | GENCOD CARTON      | UC* (height x width x length) | CARTON (height x width x length) | PALLETIZATION |
|---------------------------------|-----------------------|---------------|------------|--------------|-------------------|--------------------|-------------------------------|----------------------------------|---------------|
| AGUAPLAST ALL4IN                | Ready mixed           | Bucket 15 kg  | -          | 70530-002    | 8.412.131.670.007 | -                  | 32x24.5                       | -                                | 44            |
| AGUAPLAST ALL4IN                | Ready mixed           | Bucket 25 kg  | -          | 70530-001    | 8.412.131.669.995 | -                  | 30.5x34                       | -                                | 33            |
| AGUAPLAST BETON REPAIR          | Powder                | Box 5 kg      | 4          | 70218-001    | 8.412.131.664.938 | 58.412.131.664.933 | 30.5x21.5x12.5                | 31.5x26x43.5                     | 28            |
| AGUAPLAST BETON REPAIR          | Powder                | Sack 15 kg    | -          | 70218-003    | 8.412.131.666.550 | -                  | 54.5x28x11.5                  | -                                | 48            |
| AGUAPLAST EXPRESS               | Powder                | Box 1 kg      | 10         | 70219-002    | 8.412.131.665.027 | 58.412.131.665.022 | 18x12.5x8                     | 19x26x40.5                       | 63            |
| AGUAPLAST EXPRESS               | Powder                | Box 4 kg      | 4          | 70219-001    | 8.412.131.664.945 | 58.412.131.664.940 | 30.5x21.5x12.5                | 31.5x26x43.5                     | 28            |
| AGUAPLAST EXPRESS               | Powder                | Sack 15 kg    | -          | 70219-004    | 8.412.131.666.543 | -                  | 54.5x28x11.5                  | -                                | 48            |
| AGUAPLAST EXTERIOR              | Powder                | Box 1.5 kg    | 10         | 70220-002    | 8.412.131.664.969 | 58.412.131.664.964 | 18x12.5x8                     | 19x26x40.5                       | 45            |
| AGUAPLAST EXTERIOR              | Powder                | Box 6 kg      | 4          | 70220-001    | 8.412.131.664.952 | 58.412.131.664.957 | 30.5x21.5x12.5                | 31.5x26x43.5                     | 28            |
| AGUAPLAST FIBRA                 | Ready mixed           | Tube 200 ml   | 12         | 70471-001    | 8.412.131.665.218 | 58.412.131.665.213 | 21x8x5                        | 16x19.5x23                       | 100           |
| AGUAPLAST FIBRA                 | Ready mixed           | Bucket 750 ml | 12         | 70471-002    | 8.412.131.665.225 | 58.412.131.665.220 | 10x12.5                       | 21x25x38                         | 54            |
| AGUAPLAST FIBRA                 | Ready mixed           | Bucket 4 kg   | 4          | 70471-003    | 8.412.131.665.232 | 58.412.131.665.237 | 20.5x21.5                     | 22x41x41                         | 36            |
| AGUAPLAST FILL & FINISH         | Powder                | Box 1 kg      | 10         | 70472-002    | 8.412.131.665.508 | 58.412.131.665.503 | 18x12.5x8                     | 19x26x40.5                       | 63            |
| AGUAPLAST FILL & FINISH         | Powder                | Box 5 kg      | 4          | 70472-001    | 8.412.131.665.492 | 58.412.131.665.497 | 30.5x21.5x12.5                | 31.5x26x43.5                     | 28            |
| AGUAPLAST FLEX FILL             | Ready mixed           | Bucket 1 kg   | 12         | 70473-001    | 8.412.131.665.249 | 58.412.131.665.244 | 10x12.5                       | 21x25x38                         | 54            |
| AGUAPLAST FLEX FILL             | Ready mixed           | Bucket 5 kg   | 4          | 70473-002    | 8.412.131.665.256 | 58.412.131.665.251 | 20.5x21.5                     | 22x41x41                         | 36            |
| AGUAPLAST INSTANT               | Ready mixed           | Tube 200 ml   | 12         | 70474-001    | 8.412.131.665.263 | 58.412.131.665.268 | 21x8x5                        | 16x19.5x23                       | 100           |
| AGUAPLAST LITE FILL             | Ready mixed           | Bucket 250 ml | 12         | 70475-001    | 8.412.131.665.195 | 58.412.131.665.190 | 8x9.5                         | 16x19.5x29.5                     | 98            |
| AGUAPLAST LITE FILL             | Ready mixed           | Bucket 750 ml | 12         | 70475-002    | 8.412.131.665.201 | 58.412.131.665.206 | 10x12.5                       | 21x25x38                         | 54            |
| AGUAPLAST LITE FILL             | Ready mixed           | Bucket 4 L    | 4          | 70475-003    | 8.412.131.669.094 | 58.412.131.669.099 | 20.5x21.5                     | 22x41x41                         | 36            |
| AGUAPLAST RAPID FASSADE         | Powder                | Sack 5 kg     | -          | 70054-001    | 8.412.131.664.259 | -                  | 39x22x8                       | -                                | 140           |
| AGUAPLAST RAPID FASSADE         | Powder                | Sack 15 kg    | -          | 70054-002    | 8.412.131.664.266 | -                  | 54.5x28x11.5                  | -                                | 48            |
| AGUAPLAST RAPID FILL            | Ready mixed           | Bucket 1 kg   | 12         | 70056-004    | 8.412.131.669.742 | 58.412.131.669.747 | 10x12.5                       | 21x25x38                         | 54            |
| AGUAPLAST RAPIDURO              | Powder                | Box 1 kg      | 10         | 70221-001    | 8.412.131.665.058 | 58.412.131.665.053 | 18x12.5x8                     | 19x26x40.5                       | 63            |
| AGUAPLAST RAPIDURO              | Powder                | Box 5 kg      | 4          | 70221-002    | 8.412.131.665.065 | 58.412.131.665.060 | 30.5x21.5x12.5                | 31.5x26x43.5                     | 28            |
| AGUAPLAST RENOVA JOINT          | Ready mixed           | Tube 200 ml   | 12         | 70477-001    | 8.412.131.665.270 | 58.412.131.665.275 | 21x8x5                        | 16x19.5x23                       | 100           |
| AGUAPLAST RENOVATION            | Powder                | Sack 15 kg    | -          | 70502-001    | 8.412.131.666.598 | -                  | 54.5x28x11.5                  | -                                | 48            |
| AGUAPLAST RENOVATION            | Powder                | Sack 25 kg    | -          | 70502-003    | 8.412.131.668.646 | -                  | 52x30x11.5                    | -                                | 40            |
| AGUAPLAST SPRAY FILLER          | Spray                 | Spray 250 ml  | 6          | 70579-002    | 8.412.131.669.193 | 58.412.131.669.198 | 14.3x6.5                      | 14.6x14x20.7                     | 145           |
| AGUAPLAST STANDARD PROFESSIONAL | Ready mixed           | Bucket 15 kg  | -          | 70068-003    | 8.412.131.668.158 | -                  | 32x24.5                       | -                                | 44            |
| AGUAPLAST STANDARD PROFESSIONAL | Ready mixed           | Bucket 25 kg  | -          | 70499-001    | 8.412.131.666.567 | -                  | 30.5x34                       | -                                | 33            |
| AGUAPLAST SUPER CONTACT         | -                     | Tube 200 ml   | 12         | 70478-001    | 8.412.131.665.287 | 58.412.131.665.282 | 21x8x5                        | 16x19.5x23                       | 100           |
| AGUAPLAST SUPERFINE             | Powder                | Sack 5 kg     | -          | 70501-002    | 8.412.131.666.581 | -                  | 39x22x8                       | -                                | 140           |
| AGUAPLAST SUPERFINE             | Powder                | Sack 15 kg    | -          | 70501-001    | 8.412.131.666.574 | -                  | 54.5x28x11.5                  | -                                | 48            |
| AGUAPLAST SUPERFINE             | Powder                | Sack 25 kg    | -          | 70501-003    | 8.412.131.668.622 | -                  | 52x30x11.5                    | -                                | 40            |
| AGUAPLAST SUPER REPAIR          | Powder                | Box 1 kg      | 10         | 70222-001    | 8.412.131.664.921 | 58.412.131.664.926 | 18x12.5x8                     | 19x26x40.5                       | 63            |
| AGUAPLAST SUPER REPAIR          | Powder                | Box 5 kg      | 4          | 70222-002    | 8.412.131.665.041 | 58.412.131.665.046 | 30.5x21.5x12.5                | 31.5x26x43.5                     | 28            |
| AGUAPLAST SUPER REPAIR          | Powder                | Sack 15 kg    | -          | 70222-003    | 8.412.131.669.223 | -                  | 54.5x28x11.5                  | -                                | 48            |
| AGUAPLAST TOP FILL              | Ready mixed           | Bucket 1 kg   | 12         | 70479-001    | 8.412.131.665.188 | 58.412.131.665.183 | 10x12.5                       | 21x25x38                         | 54            |
| AGUAPLAST TOP FINISH            | Ready mixed           | Bucket 1 kg   | 12         | 70480-001    | 8.412.131.665.164 | 58.412.131.665.169 | 10x12.5                       | 21x25x38                         | 54            |
| AGUAPLAST TOP FINISH            | Ready mixed           | Bucket 5 kg   | 4          | 70480-002    | 8.412.131.665.171 | 58.412.131.665.176 | 20.5x21.5                     | 22x41x41                         | 36            |

**▼ AGUAPLAST**

| PRODUCT                         | POWDER OR READY MIXED | PACKAGE        | UC* CARTON | PRODUCT CODE | GENCOD UC*        | GENCOD CARTON      | UC* (height x width x length) | CARTON (height x width x length) | PALLETIZATION |
|---------------------------------|-----------------------|----------------|------------|--------------|-------------------|--------------------|-------------------------------|----------------------------------|---------------|
| AGUAPLAST UNIVERSAL FASSADE     | Ready mixed           | Bucket 10 L    | -          | 70079-001    | 8.412.131.662.613 | -                  | 32x24.5                       | -                                | 44            |
| AGUAPLAST UNIVERSAL MIX         | Ready mixed           | Bucket 4 L     | 4          | 70081-002    | 8.412.131.664.297 | 58.412.131.664.292 | 20.5x21.5                     | 22x41x41                         | 36            |
| AGUAPLAST UNIVERSAL MIX         | Ready mixed           | Bucket 10 L    | -          | 70081-001    | 8.412.131.662.330 | -                  | 32x24.5                       | -                                | 44            |
| AGUAPLAST UNIVERSAL PRO         | Powder                | Sack 5 kg      | -          | 70082-002    | 8.412.131.662.088 | -                  | 39x22x8                       | -                                | 140           |
| AGUAPLAST UNIVERSAL PRO         | Powder                | Sack 20 kg     | -          | 70082-001    | 8.412.131.662.057 | -                  | 52x30x11.5                    | -                                | 50            |
| AGUAPLAST WOODFILLER BEECH      | Ready mixed           | Tube 125 ml    | 12         | 70481-007    | 8.412.131.665.362 | 58.412.131.665.367 | 18.5x6.5x4                    | 12.5x17x19                       | 144           |
| AGUAPLAST WOODFILLER CHERRY     | Ready mixed           | Tube 125 ml    | 12         | 70481-006    | 8.412.131.665.355 | 58.412.131.665.350 | 18.5x6.5x4                    | 12.5x17x19                       | 144           |
| AGUAPLAST WOODFILLER DARK OAK   | Ready mixed           | Tube 125 ml    | 12         | 70481-017    | 8.412.131.669.384 | 58.412.131.669.389 | 18.5x6.5x4                    | 12.5x17x19                       | 144           |
| AGUAPLAST WOODFILLER NEUTRAL    | Ready mixed           | Tube 125 ml    | 12         | 70481-002    | 8.412.131.665.317 | 58.412.131.665.312 | 18.5x6.5x4                    | 12.5x17x19                       | 144           |
| AGUAPLAST WOODFILLER NEUTRAL    | Ready mixed           | Bucket 1 kg    | 12         | 70481-015    | 8.412.131.669.353 | 58.412.131.669.358 | 10x12.5                       | 21x25x38                         | 54            |
| AGUAPLAST WOODFILLER MAHOGANY   | Ready mixed           | Tube 125 ml    | 12         | 70481-005    | 8.412.131.665.348 | 58.412.131.665.343 | 18.5x6.5x4                    | 12.5x17x19                       | 144           |
| AGUAPLAST WOODFILLER OAK        | Ready mixed           | Tube 125 ml    | 12         | 70481-004    | 8.412.131.665.331 | 58.412.131.665.336 | 18.5x6.5x4                    | 12.5x17x19                       | 144           |
| AGUAPLAST WOODFILLER OAK        | Ready mixed           | Bucket 1 kg    | 12         | 70481-014    | 8.412.131.669.346 | 58.412.131.669.341 | 10x12.5                       | 21x25x38                         | 54            |
| AGUAPLAST WOODFILLER PINE       | Ready mixed           | Tube 125 ml    | 12         | 70481-001    | 8.412.131.665.300 | 58.412.131.665.305 | 18.5x6.5x4                    | 12.5x17x19                       | 144           |
| AGUAPLAST WOODFILLER PINE       | Ready mixed           | Bucket 1 kg    | 12         | 70481-012    | 8.412.131.669.322 | 58.412.131.669.327 | 10x12.5                       | 21x25x38                         | 54            |
| AGUAPLAST WOODFILLER RUSTIC OAK | Ready mixed           | Tube 125 ml    | 12         | 70481-016    | 8.412.131.669.377 | 58.412.131.669.372 | 18.5x6.5x4                    | 12.5x17x19                       | 144           |
| AGUAPLAST WOODFILLER SAPELE     | Ready mixed           | Tube 125 ml    | 12         | 70481-008    | 8.412.131.665.379 | 58.412.131.665.374 | 18.5x6.5x4                    | 12.5x17x19                       | 144           |
| AGUAPLAST WOODFILLER TEAK       | Ready mixed           | Tube 125 ml    | 12         | 70481-009    | 8.412.131.665.386 | 58.412.131.665.381 | 18.5x6.5x4                    | 12.5x17x19                       | 144           |
| AGUAPLAST WOODFILLER WALNUT     | Ready mixed           | Tube 125 ml    | 12         | 70481-003    | 8.412.131.665.324 | 58.412.131.665.329 | 18.5x6.5x4                    | 12.5x17x19                       | 144           |
| AGUAPLAST WOODFILLER WALNUT     | Ready mixed           | Bucket 1 kg    | 12         | 70481-013    | 8.412.131.669.339 | 58.412.131.669.334 | 10x12.5                       | 21x25x38                         | 54            |
| AGUAPLAST WOODFILLER WENGE      | Ready mixed           | Tube 125 ml    | 12         | 70481-010    | 8.412.131.665.393 | 58.412.131.665.398 | 18.5x6.5x4                    | 12.5x17x19                       | 144           |
| AGUAPLAST WOODFINISHER          | Ready mixed           | Tube 350 g     | 12         | 70084-001    | 8.412.131.662.354 | 58.412.131.662.359 | 21x8x5                        | 16x19.5x23                       | 100           |
| AGUAPLAST WOODFINISHER          | Ready mixed           | Bucket 1.25 kg | 12         | 70084-002    | 8.412.131.669.360 | 58.412.131.669.365 | 10x12.5                       | 21x25x38                         | 54            |
| AGUAPLAST WOOD REPAIR FILLER    | Powder                | Box 1 kg       | 10         | 70608-002    | 8.412.131.669.490 | 58.412.131.669.495 | 18x12.5x8                     | 19x26x40.5                       | 63            |

**▼ RENOVATION SPECIALITIES**

| PRODUCT               | PACKAGE       | UC* CARTON | PRODUCT CODE | GENCOD UC*        | GENCOD CARTON      | UC* (height x width x length) | CARTON (height x width x length) | PALLETIZATION |
|-----------------------|---------------|------------|--------------|-------------------|--------------------|-------------------------------|----------------------------------|---------------|
| CHAMELEON TRANSPARENT | Bucket 600 ml | 6          | 70600-002    | 8.412.131.669.315 | 58.412.131.669.310 | 13x10                         | 30.5x21x15                       | 112           |
| CHAMELEON WHITE       | Bucket 750 ml | 6          | 70600-001    | 8.412.131.669.261 | 58.412.131.669.266 | 13x10                         | 30.5x21x15                       | 112           |
| CHAMELEON WHITE       | Bucket 2 L    | 2          | 70600-003    | 8.412.131.669.469 | 58.412.131.669.464 | 15.5x17                       | 17x35x35                         | 105           |
| CHAMELEON SPRAY       | Spray 400 ml  | 6          | 70600-005    | 8.412.131.669.735 | 58.412.131.669.730 | 19.5x7                        | 20x14.5x21                       | 116           |
| FIXACRYL SPRAY        | Spray 400 ml  | 6          | 70237-008    | 8.412.131.670.144 | 58.412.131.670.149 | 19.4x63                       | 25x21x13                         | 145           |
| DRY WALL PRIMER       | Bucket 4 L    | 2          | 70652-002    | 8.412.131.671.394 | 58.412.131.671.399 | 20.5x21.5                     | 20.5x20.5x40                     | 72            |
| DRY WALL PRIMER       | Bucket 15 L   | -          | 70652-001    | 8.412.131.670.540 | -                  | 30.5x34                       | -                                | 33            |

# **Beissier**

---

**Beissier S.A.U.**

Txirrita Maleo, 14  
E-20100 Errenteria  
(34) 943 344 070  
[beissier@beissier.es](mailto:beissier@beissier.es)  
[www.beissier.com](http://www.beissier.com)

---

